


Specifications

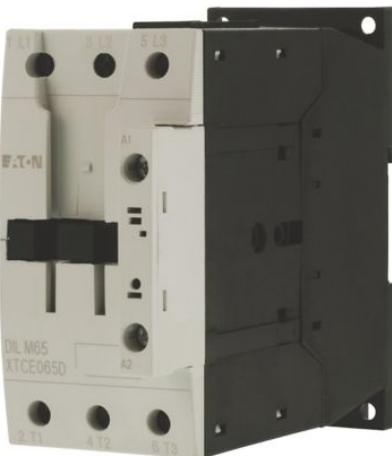

Eaton 277902

Eaton Moeller® series DILM Contactor, 3 pole, 380 V 400 V 30 kW, 230 V 50/60 Hz, AC operation, Screw terminals

General specifications

PRODUCT NAME	Eaton Moeller® series DILM contactor
CATALOG NUMBER	277902
MODEL CODE	DILM65(230V50/60HZ)
EAN	4015082779023
PRODUCT LENGTH/DEPTH	132.1 mm
PRODUCT HEIGHT	115 mm
PRODUCT WIDTH	55 mm
PRODUCT WEIGHT	0.872 kg
CERTIFICATIONS	UL 60947-4-1 UL File No.: E29096 CSA CE VDE 0660 CSA File No.: 012528 CSA-C22.2 No. 60947-4-1-14 IEC/EN 60947-4-1 CSA Class No.: 2411-03, 3211-04 IEC/EN 60947 UL UL Category Control No.: NLDX
CATALOG NOTES	Contacts according to EN 50012

Features & Functions

NUMBER OF POLES	Three-pole
-----------------	------------

General

APPLICATION	Contactors for Motors
FRAME SIZE	FS3
LIFESPAN, MECHANICAL	7,000,000 Operations (Coil 50/60 Hz) 10,000,000 Operations (AC operated)
OPERATING FREQUENCY	5000 mechanical Operations/h (AC operated)
OVERVOLTAGE CATEGORY	III
POLLUTION DEGREE	3
PRODUCT CATEGORY	Contactors
PROTECTION	Finger and back-of-hand proof, Protection against direct contact when actuated from front (EN 50274)
RATED IMPULSE WITHSTAND VOLTAGE (UIMP)	8000 V AC
RESISTANCE PER POLE	1.9 mΩ
SUITABLE FOR	Also motors with efficiency class IE3
UTILIZATION CATEGORY	AC-3: Normal AC induction motors: starting, switch off during running AC-1: Non-inductive or slightly inductive loads, resistance furnaces AC-4: Normal AC induction motors: starting, plugging, reversing, inching
VOLTAGE TYPE	AC

Ambient conditions, mechanical

SHOCK RESISTANCE	7 g, N/O auxiliary contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms 7 g, N/O auxiliary contact, Mechanical, according to IEC/EN 60068-2-27 when tabletop-mounted, Half-sinusoidal shock 10 ms 10 g, N/O main contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms 10 g, N/O main contact, Mechanical, according to IEC/EN 60068-2-27 when tabletop-mounted, Half-sinusoidal shock 10 ms 5 g, N/C auxiliary contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms 5 g, N/C auxiliary contact, Mechanical, according to IEC/EN 60068-2-27 when tabletop-mounted, Half-sinusoidal shock 10 ms
-------------------------	--

Climatic environmental conditions

AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
AMBIENT OPERATING TEMPERATURE - MAX	60 °C
AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MIN	-25 °C
AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MAX	40 °C
AMBIENT STORAGE TEMPERATURE - MIN	-40 °C
AMBIENT STORAGE TEMPERATURE - MAX	80 °C
CLIMATIC PROOFING	Damp heat, cyclic, to IEC 60068-2-30 Damp heat, constant, to IEC 60068-2-78

Electro Magnetic Compatibility

EMITTED INTERFERENCE	According to EN 60947-1
INTERFERENCE IMMUNITY	According to EN 60947-1

Terminal capacities

TERMINAL CAPACITY (COPPER BAND)	2 x (6 x 9 x 0.8) mm (Number of segments x width x thickness), Main cables
TERMINAL CAPACITY (FLEXIBLE WITH FERRULE)	1 x (0.75 - 35) mm ² , Main cables 2 x (0.75 - 25) mm ² , Main cables 1 x (0.75 - 2.5) mm ² , Control circuit cables 2 x (0.75 - 2.5) mm ² , Control circuit cables
TERMINAL CAPACITY (SOLID)	2 x (0.75 - 16) mm ² , Main cables 1 x (0.75 - 4) mm ² , Control circuit cables 1 x (0.75 - 16) mm ² , Main cables 2 x (0.75 - 2.5) mm ² , Control circuit cables
TERMINAL CAPACITY (SOLID/STRANDED AWG)	Single 14 - 1, double 14 - 2, Main cables 18 - 14, Control circuit cables
TERMINAL CAPACITY	1 x (16 - 50) mm ² , Main

(STRANDED)	cables 2 x (16 - 35) mm ² , Main cables
STRIPPING LENGTH (MAIN CABLE)	14 mm
STRIPPING LENGTH (CONTROL CIRCUIT CABLE)	10 mm
SCREW SIZE	M3.5, Terminal screw, Control circuit cables M6, Terminal screw, Main cables
SCREWDRIVER SIZE	0.8 x 5.5/1 x 6 mm, Terminal screw, Standard screwdriver 2, Terminal screw, Pozidriv screwdriver
TIGHTENING TORQUE	1.2 Nm, Screw terminals, Control circuit cables 3.3 Nm, Screw terminals, Main cables

Electrical Rating

RATED BREAKING CAPACITY AT 220/230 V	650 A
RATED BREAKING CAPACITY AT 380/400 V	650 A
RATED BREAKING CAPACITY AT 500 V	650 A
RATED BREAKING CAPACITY AT 660/690 V	370 A
RATED OPERATIONAL CURRENT (IE) AT AC-1, 380 V, 400 V, 415 V	98 A
RATED OPERATIONAL CURRENT (IE) AT AC-3, 220 V, 230 V, 240 V	65 A
RATED OPERATIONAL CURRENT (IE) AT AC-3, 380 V, 400 V, 415 V	65 A
RATED OPERATIONAL CURRENT (IE) AT AC-3, 440 V	65 A
RATED OPERATIONAL CURRENT (IE) AT AC-3, 500 V	65 A
RATED OPERATIONAL CURRENT (IE) AT AC-3, 660 V, 690 V	37 A
RATED OPERATIONAL CURRENT (IE) AT AC-4, 220 V, 230 V, 240 V	25 A
RATED OPERATIONAL CURRENT (IE) AT AC-4, 400 V	25 A
RATED OPERATIONAL CURRENT (IE) AT AC-4, 500 V	25 A
RATED OPERATIONAL CURRENT (IE) AT AC-4, 660 V, 690 V	20 A
RATED OPERATIONAL CURRENT (IE) AT DC-1, 60 V	72 A
RATED OPERATIONAL CURRENT (IE) AT DC-1, 110 V	72 A
RATED OPERATIONAL CURRENT (IE) AT DC-1, 220 V	65 A
RATED INSULATION VOLTAGE (UI)	690 V
RATED OPERATIONAL	98 A

Short-circuit rating

SHORT-CIRCUIT CURRENT RATING (BASIC RATING)	10 kA, 250 A max. fuse, SCCR (UL/CSA) 10 kA, 250 A max. CB, SCCR (UL/CSA)
SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 480 V)	100 kA, 150 A CLASS J max. fuse, SCCR (UL/CSA) 30 kA, 250 A max. fuse, SCCR (UL/CSA) 65 kA, 100 A max. CB, SCCR (UL/CSA) 30 kA, 250 A max. CB, SCCR (UL/CSA)
SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 600 V)	100 kA, 150 A CLASS J max. fuse, SCCR (UL/CSA) 30 kA, 250 A max. fuse, SCCR (UL/CSA) 30 kA, 250 A max. CB, SCCR (UL/CSA)
SHORT-CIRCUIT PROTECTION RATING (TYPE 1 COORDINATION) AT 400 V	250 A gG/gL
SHORT-CIRCUIT PROTECTION RATING (TYPE 1 COORDINATION) AT 690 V	100 A gG/gL
SHORT-CIRCUIT PROTECTION RATING (TYPE 2 COORDINATION) AT 400 V	125 A gG/gL
SHORT-CIRCUIT PROTECTION RATING (TYPE 2 COORDINATION) AT 690 V	80 A gG/gL

**CURRENT (IE) AT AC-1,
380 V, 400 V, 415 V**

RATED OPERATIONAL

**POWER AT AC-3, 240 V, 50
HZ**

RATED OPERATIONAL

**POWER AT AC-3, 380/400
V, 50 HZ**

RATED OPERATIONAL

**POWER AT AC-3, 415 V, 50
HZ**

RATED OPERATIONAL

**POWER AT AC-4, 220/230
V, 50 HZ**

RATED OPERATIONAL

**POWER AT AC-4, 240 V, 50
HZ**

RATED OPERATIONAL

**POWER AT AC-4, 415 V, 50
HZ**

RATED OPERATIONAL

**POWER AT AC-4, 440 V, 50
HZ**

RATED OPERATIONAL

**POWER AT AC-4, 500 V, 50
HZ**

RATED OPERATIONAL

**POWER AT AC-4, 660/690
V, 50 HZ**

RATED OPERATIONAL

**VOLTAGE (UE) AT AC -
MAX**

Conventional thermal current

CONVENTIONAL

**THERMAL CURRENT ITH
(1-POLE, ENCLOSED)**

CONVENTIONAL

**THERMAL CURRENT ITH
(3-POLE, ENCLOSED)**

CONVENTIONAL

**THERMAL CURRENT ITH
AT 55°C (3-POLE, OPEN)**

CONVENTIONAL

**THERMAL CURRENT ITH
OF MAIN CONTACTS (1-
POLE, OPEN)**

Switching capacity

**SWITCHING CAPACITY
(MAIN CONTACTS,
GENERAL USE)**

88 A, Maximum motor
rating (UL/CSA)

Switching time

ARCING TIME	10 ms
SWITCHING TIME (AC OPERATED, MAKE CONTACTS, CLOSING DELAY) - MIN	12 ms
SWITCHING TIME (AC OPERATED, MAKE CONTACTS, CLOSING DELAY) - MAX	18 ms
SWITCHING TIME (AC OPERATED, MAKE CONTACTS, OPENING DELAY) - MIN	8 ms
SWITCHING TIME (AC OPERATED, MAKE CONTACTS, OPENING DELAY) - MAX	13 ms

Magnet system

DROP-OUT VOLTAGE	AC operated: 0.6 - 0.3 x Uc, AC operated
DUTY FACTOR	100 %
PICK-UP VOLTAGE	0.8 - 1.1 V AC x Uc
POWER CONSUMPTION, PICK-UP, 50 HZ	154 VA, Dual-frequency coil in a cold state and 1.0 x Us 168 VA, Dual-frequency coil in a cold state and 1.0 x Us
POWER CONSUMPTION, PICK-UP, 60 HZ	168 VA, Dual-frequency coil in a cold state and 1.0 x Us 154 VA, Dual-frequency coil in a cold state and 1.0 x Us
POWER CONSUMPTION, SEALING, 50 HZ	4.1 W, Dual-frequency coil in a cold state and 1.0 x Us
POWER CONSUMPTION, SEALING, 60 HZ	22 VA, Dual-frequency coil in a cold state and 1.0 x Us, at 60 Hz 14 VA, Dual-frequency coil in a cold state and 1.0 x Us, at 60 Hz 4.1 W, Dual-frequency coil in a cold state and 1.0 x Us
RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MIN	230 V
RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MAX	230 V
RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MIN	230 V
RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MAX	230 V
RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MIN	0 V
RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MAX	0 V

Motor Rating

ASSIGNED MOTOR
POWER AT 115/120 V, 60 HZ, 1-PHASE 5 HP

ASSIGNED MOTOR
POWER AT 200/208 V, 60 HZ, 3-PHASE 20 HP

ASSIGNED MOTOR
POWER AT 230/240 V, 60 HZ, 1-PHASE 15 HP

ASSIGNED MOTOR
POWER AT 230/240 V, 60 HZ, 3-PHASE 25 HP

ASSIGNED MOTOR
POWER AT 460/480 V, 60 HZ, 3-PHASE 50 HP

ASSIGNED MOTOR
POWER AT 575/600 V, 60 HZ, 3-PHASE 60 HP

Communication

CONNECTION TO SMARTWIRE-DT No

Contacts

NUMBER OF AUXILIARY CONTACTS (NORMALLY CLOSED CONTACTS) 0

NUMBER OF AUXILIARY CONTACTS (NORMALLY OPEN CONTACTS) 0

Safety

SAFE ISOLATION
440 V AC, Between the contacts, According to EN 61140
440 V AC, Between coil and contacts, According to EN 61140

Special purpose ratings

SPECIAL PURPOSE RATING OF BALLAST ELECTRICAL DISCHARGE LAMPS	88 A (600V 60Hz 3phase, 347V 60Hz 1phase) 88 A (480V 60Hz 3phase, 277V 60Hz 1phase)
SPECIAL PURPOSE RATING OF DEFINITE PURPOSE RATING	390 A, LRA 480 V 60 Hz 3-ph, 100,000 cycles acc. to UL 1995, (UL/CSA) 65 A, FLA 480 V 60 Hz 3-ph, 100,000 cycles acc. to UL 1995, (UL/CSA)
SPECIAL PURPOSE RATING OF ELEVATOR CONTROL	30 HP, 480 V 60 Hz 3-ph, (UL/CSA) 15 HP, 240 V 60 Hz 3-ph, (UL/CSA) 42 A, 240 V 60 Hz 3-ph, (UL/CSA) 40 A, 480 V 60 Hz 3-ph, (UL/CSA) 10 HP, 200 V 60 Hz 3-ph, (UL/CSA) 32.2 A, 200 V 60 Hz 3-ph, (UL/CSA) 40 HP, 600 V 60 Hz 3-ph, (UL/CSA) 41 A, 600 V 60 Hz 3-ph, (UL/CSA)
SPECIAL PURPOSE RATING OF RESISTANCE AIR HEATING	88 A, 480 V 60 Hz 3phase, 277 V 60 Hz 1phase, (UL/CSA) 88 A, 600 V 60 Hz 3phase, 347 V 60 Hz 1phase, (UL/CSA)
SPECIAL PURPOSE RATING OF TUNGSTEN INCANDESCENT LAMPS	88 A, 600 V 60 Hz 3phase, 347 V 60 Hz 1phase, (UL/CSA) 88 A, 480 V 60 Hz 3phase, 277 V 60 Hz 1phase, (UL/CSA)

Design verification

EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID	17.1 W
HEAT DISSIPATION CAPACITY PDISS	0 W
RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)	65 A
10.2.2 CORROSION RESISTANCE	Meets the product standard's requirements.
10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES	Meets the product standard's requirements.
10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT	Meets the product standard's requirements.
10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS	Meets the product standard's requirements.
10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION	Meets the product standard's requirements.
10.2.5 LIFTING	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 MECHANICAL IMPACT	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 INSCRIPTIONS	Meets the product standard's requirements.
10.3 DEGREE OF PROTECTION OF ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 CLEARANCES AND CREEPAGE DISTANCES	Meets the product standard's requirements.
10.5 PROTECTION AGAINST ELECTRIC SHOCK	Does not apply, since the entire switchgear needs to be evaluated.
10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC	Is the panel builder's responsibility.

STRENGTH	
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
10.10 TEMPERATURE RISE	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Resources

	SmartWire-DT Catalog
CATALOGUES	Product Range Catalog Switching and protecting motors eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf
CHARACTERISTIC CURVE	eaton-contactors-component-dilm-characteristic-curve-003.eps eaton-contactors-switch-dilm-characteristic-curve-002.eps eaton-contactors-switch-dilm-characteristic-curve.eps
DECLARATIONS OF CONFORMITY	eaton-contactor-declaration-of-conformity-uk251225en.pdf eaton-contactor-declaration-of-conformity-eu250742en.pdf
DRAWINGS	eaton-contactors-dilm-dimensions-002.eps eaton-contactors-mounting-dilm-dimensions.eps eaton-contactors-mounting-dilm-dimensions-002.eps eaton-contactors-dilm-dimensions-012.eps eaton-contactors-dilm-3d-drawing-011.eps eaton-contactors-mounting-dilm-3d-drawing.eps
ECAD MODEL	ETN.277902.edz
INSTALLATION INSTRUCTIONS	IL03407033Z
INSTALLATION VIDEOS	WIN-WIN with push-in technology
MCAD MODEL	DA-CS-dil_m40_72

[DA-CD-dil_m40_72](#)

PEP ECO-PASSPORT [eaton-iec-contactors-pep-eato-00126-v0101-en.pdf](#)

SYSTEM OVERVIEW [eaton-contactors-dilm-contactor-system-overview.eps](#)

WIRING DIAGRAMS [eaton-contactors-contact-dilm-wiring-diagram-003.eps](#)

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

