


DP1223



Converter IO-Link - 0...10 V

Converter IO-Link/2x0-10V

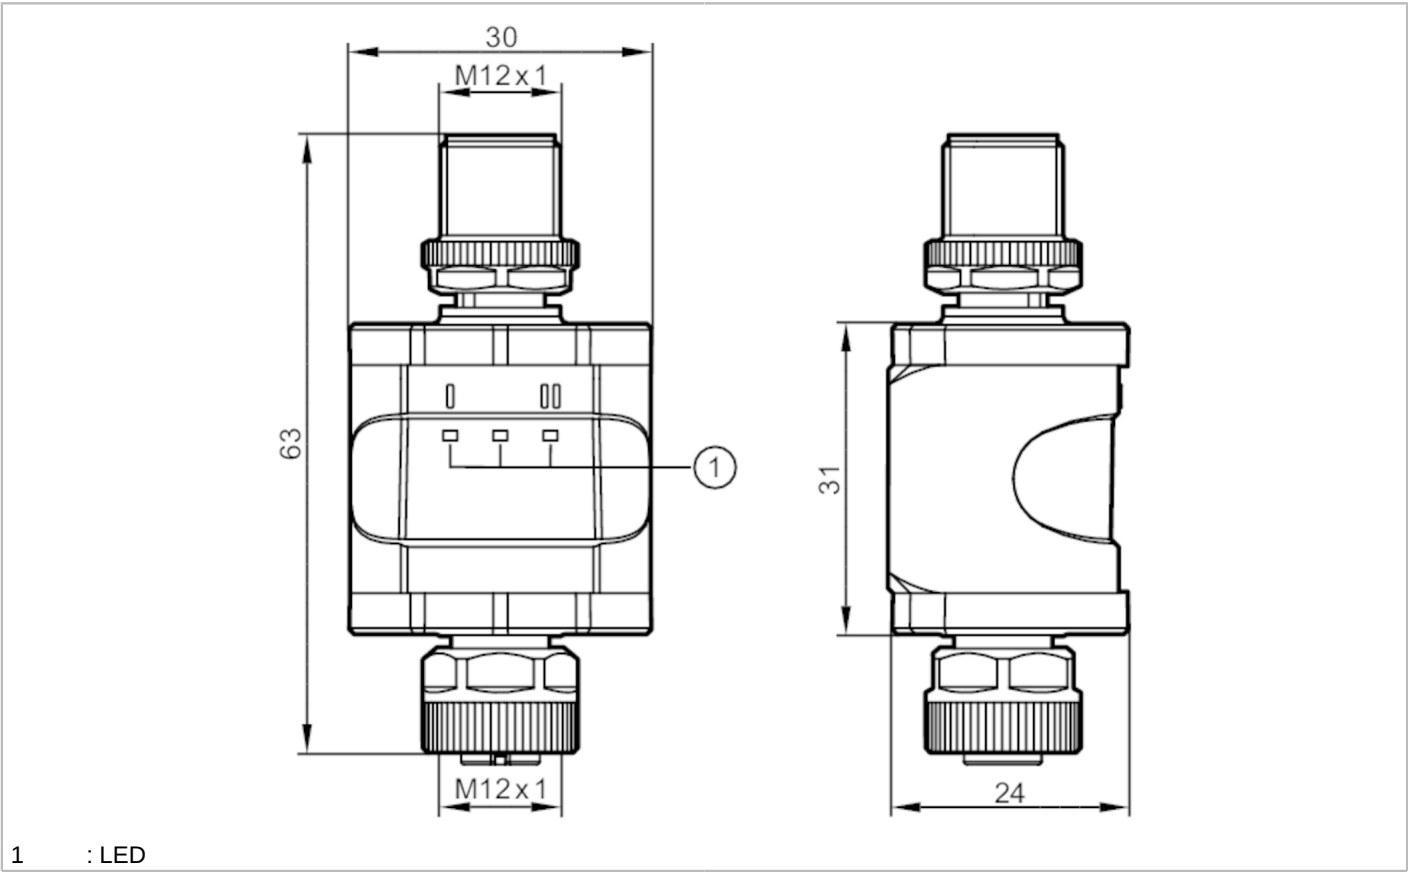

Product characteristics	
Number of inputs and outputs	Number of analogue outputs: 2
Communication interface	IO-Link
Electrical data	
Operating voltage [V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC [V]	24
Current consumption [mA]	300
Max. current load total [A]	0.2
Inputs / outputs	
Number of inputs and outputs	Number of analogue outputs: 2
Outputs	
Number of analogue outputs	2
Analogue voltage output [V]	0...10
Min. load resistance [Ω]	3000
Precision analogue output [%]	0,25
Interfaces	
Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9



Converter IO-Link - 0...10 V

Converter IO-Link/2x0-10V

Profiles	Smart Sensor	
SIO mode	no	
Required master port type	A/B	
Process data analogue	2	
Min. process cycle time [ms]	3.6	
IO-Link process data (cyclical)	function	bit length
	device status	4
	voltage - output 1	16
	voltage - output 2	16
IO-Link functions (acyclical)	application specific tag	
Supported DeviceIDs	Type of operation	DeviceID
	default	614
Operating conditions		
Ambient temperature [°C]	-25...70	
Note on ambient temperature	2000 m: -25...70 °C	
	3000 m: -25...64 °C	
	4000 m: -25...62 °C	
Storage temperature [°C]	-25...70	
Max. relative air humidity [%]	90; (linearly decreasing to 50 % (40 °C) non condensing)	
Max. height above sea level [m]	4000	
Protection	IP 67	
Pollution degree	2	
Tests / approvals		
MTTF [years]	432	
Mechanical data		
Weight [g]	91	
Materials	housing: PA	
Displays / operating elements		
Display	operation	1 x LED, green
	analogue output	2 x LED, yellow
Accessories		
Accessories (optional)	mounting clip	
Remarks		
Remarks	For further information please see the operating instructions.	
Pack quantity	1 pcs.	



Converter IO-Link - 0...10 V


Converter IO-Link/2x0-10V

Electrical connection - plug



1:	L+
2:	not used
3:	L-
4:	C/Q IO-Link

Electrical connection - socket



1:	L+
2:	0...10 V analogue output 2
3:	L-
4:	0...10 V analogue output 1
5:	not used