# Spring-loaded test probe

# GKS-113 287 260 N 1502 M

Item GKS-113-0330







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





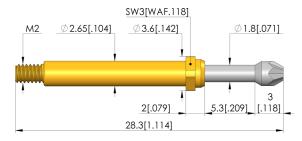



#### **General** data

Min. temperature:

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-113 M screw-in Grid: 4 mm [157 mil] Contacting from: Via, Female connector Magnetic: Yes Installation type: Screw-in Yes

Quick-exchange system: Adjustable installation height: Non-rotating: 10 - 20 cNm [.885 - 1.77 lbf·in] Screw-in torque: Compatible receptacle(s):

Max. temperature: + 80 °C [+ 176 °F] RoHS-compliant: RoHS-3;6a;6c

#### **Electrical data**

Current load capacity / rated current: 5 A Typical resistance (Ri): <30 mOhm

## Mechanical data

Total length: 28.3 mm [1.11 in] Barrel diameter: 2.65 mm [.104 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.5 N [1.79 ozf] Collar height: 02 Spring force at working stroke: 1.5 N [5.39 ozf] Recommended working stroke: 4 mm [.157 in]

### Tip style data

No

KS-113 M


- 40 °C [- 104 °F]

87 90° hexagonal pyramid with cutting edges, flat head Tip style: Tip diameter: 2.6 mm [.102 in] N nickel Tip style surface: Tip style material: 2 steel

# Spring-loaded test probe GKS-113 287 260 N 1502 M

Item GKS-113-0330



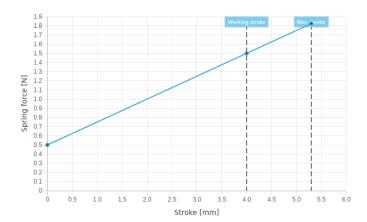

## **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

