



Product Features:

- Input voltage range: 176~264Vac;
- Constant power design;
- External NTC;
- DALI-2 & VMF, Dim to off;
- NFC programmable;
- Constant Lumen Output (CLO);
- Suitable for luminaires of protection class I and II;
- Auxiliary power supply: 24V/250mA;
- Surge protection: 6KV line-line, 10KV line-earth;
- Multiple protection: SCP, OVP(Output), OTP;
- Meet the zhaga Book 13;
- IP20;
- 7 Years Warranty

Application

- Suitable for LED roadway lighting, plant lighting, industrial lighting, landscape lighting, etc.

DESCRIPTION

U6 series is an ultra-high efficiency DALI programmable IP20 outdoor constant current drive power, input voltage range 176-264 Vac. Designed for European street lamps, compatible Class I & Class II. U6 series has lightning protection, input over-voltage protection, output over-voltage protection, short-circuit protection and over-temperature protection.

MODELS


Model Number [1]	Max Output Power (W)	Output Voltage Range (Vdc)	Full Power Output Voltage Range (Vdc)	Full Power Current Adjustable Range (A) [2]	Default Output Current Setting(A)	Typical Efficiency [3]	PF
U6-120D172	120	75-172	114-172	0.7-1.05	0.7	93%	0.98

Notes:

[1]. All performance parameters are at 25 degrees ambient temperature 230 Vac input, full load conditions measured typical values, except specified;

[2]. When the power supply reaches the set life(example 60000H), when the power supply is restarted, The output current remains constant 10%Io, Or output flashing warning to indicate that the power supply needs to be replaced.

OPERATING AREA

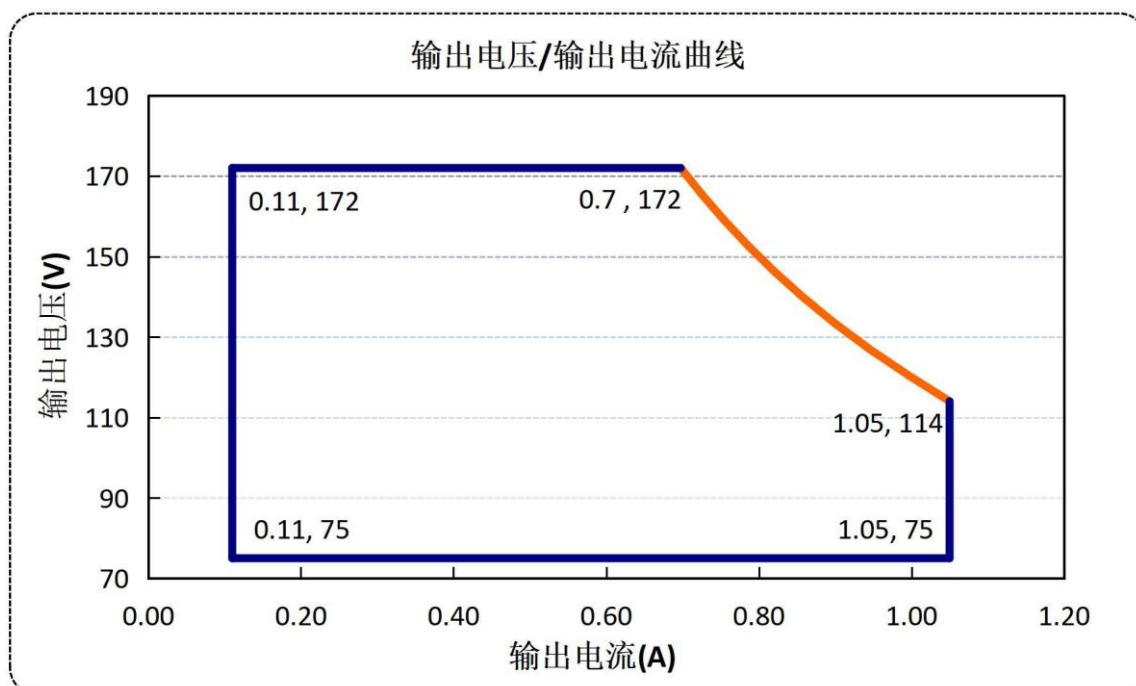

INPUT SPECIFICATIONS

Parameter	Min.		Typ.		Max.		Notes
Input Voltage	176Vac		200-240Vac		264Vac		
Input Frequency	47Hz		50/60		63Hz		
Leakage Current	-		-		0.7mA		240Vac/60Hz
Input AC Current	-		-		1.0A		200-240Vac & full load
Inrush Current	-		-		75A		230Vac & full load
Standby Power Consumption	-		-		0.5W		230Vac/50Hz
Power Factor	0.96		0.98				240Vac, 50-60Hz, & full load
	0.93		0.95				200-240Vac, 50-60Hz, 60%-100% load
THD	-		5%		10%		200-240Vac, 50-60Hz, 60%-100% load
Max. NO. of PSUs on Circuit Breaker	B10	2	B16	3	B25	5	230Vac 100% load
	C10	4	C16	6	C25	9	

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%	-	5%	Iset>0.35A
Output Current Setting Range (A) U6-120D172	10%	-	100%	
Output Current Setting Range with Constant Power U6-120D172	0.7	-	1.05	
Total Output Current Ripple(pk-pk)	-	5%	10%	20MHz BW, full load& LED load, the ripple would be tiny different under different LED load.
Startup Overshoot Current	-	-	10%	200~240Vac &100% Load, load is LED
No Load Output Voltage(V) U6-120D172	-	-	200V	
Auxiliary Power Supply	22.8V	24V	25.2V	176-264Vac
	-	-	250mA	
Line Regulation	-1%	-	1%	25°C±10°C ambient temperature, input voltage changes from 200Vac to264Vac.
Load Regulation	-3%	-	3%	25°C±10°C ambient temperature, Input Voltage 230Vac, load changes from 60% to 100%.
Turn-on Delay Time	-	-	1.5S	230Vac,100% load

GENERAL SPECIFICATIONS

Parameter		Min.	Typ.	Max.	Notes
Efficiency @230Vac U6-120D172 Io=0.70A Io=1.05A		91% 91%	93% 93%		Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	-	Max 5mA/60S
	Input-PE	-	3000Vac	-	
	Output-PE	-	1600Vac	-	
Insulation Resistance		10MΩ	-	-	Input-Output, 500Vdc/60S/25°C /70%RH
MTBF		-	200000Hrs	-	25°C±10°C ambient temperature, 230Vac,80% load (MIL-HDBK-217F)
Lifetime		-	60000Hrs	-	Tc=75°C, 230Vac&100% load, 10% failure rate
Ambient Temperature		-40°C		+55°C	230Vac&100% load
Operating Case Temperature for Safety Tc_s		-40°C	-	+85°C	
Operating Case Temperature for Warranty Tc_s		-40°C	-	+75°C	7 years warranty case temperature Humidity: 10% to 95% RH No condensation



U6 Series NFC 120W Programmable Driver

Storage Temperature	-40℃	-	+85℃	Humidity: 5% to 85% RH No condensation
Dimensions (L*W*H)mm	132.5L*77W*40H			
Net Weight	500±50g/PCS			
Package	L555mm*W375mm*H235mm; 30PCS/Ctn			

DIMMING

Parameter		Min.	Typ.	Max.	Notes
DALI 2	DA,DA High Voltage Level	9.5	16	22.5	
	DA,DA Low Voltage Level	-6.5	0	6.5	
Dimming Output Range	U6-120D172	10%Iset	-	100%Iset	I _{max} =1.05A

SAFETY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
ENEC		EN62384	√
CB	CB Countries	IEC61347-1, IEC61347-2-13	√
BIS	India	IS 15885(PART 2/SEC 13)	

EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√


INSULATION

Insulation	Input/Mains	DALI	LED Output	Supporting Surface	Auxiliary Power Supply
Input/Mains	/	Double	Double	Double	Double
DALI	Double	/	Basic/Supplementary	Double	Basic/Supplementary
LED Output	Double	Basic/Supplementary	/	Double	Basic/Supplementary
Supporting Surface	Double	Double	Double	/	Double
Auxiliary Power Supply	Double	Basic/Supplementary	Basic/Supplementary	Double	/


NOTE:

This LED driver meets the EMI specifications above, but as a component of a luminaire, end customer need to identify the EMI performance of a luminaire including LED driver, other devices connected to the driver and on the luminaire itself.


INRUSH CURRENT WAVEFORM


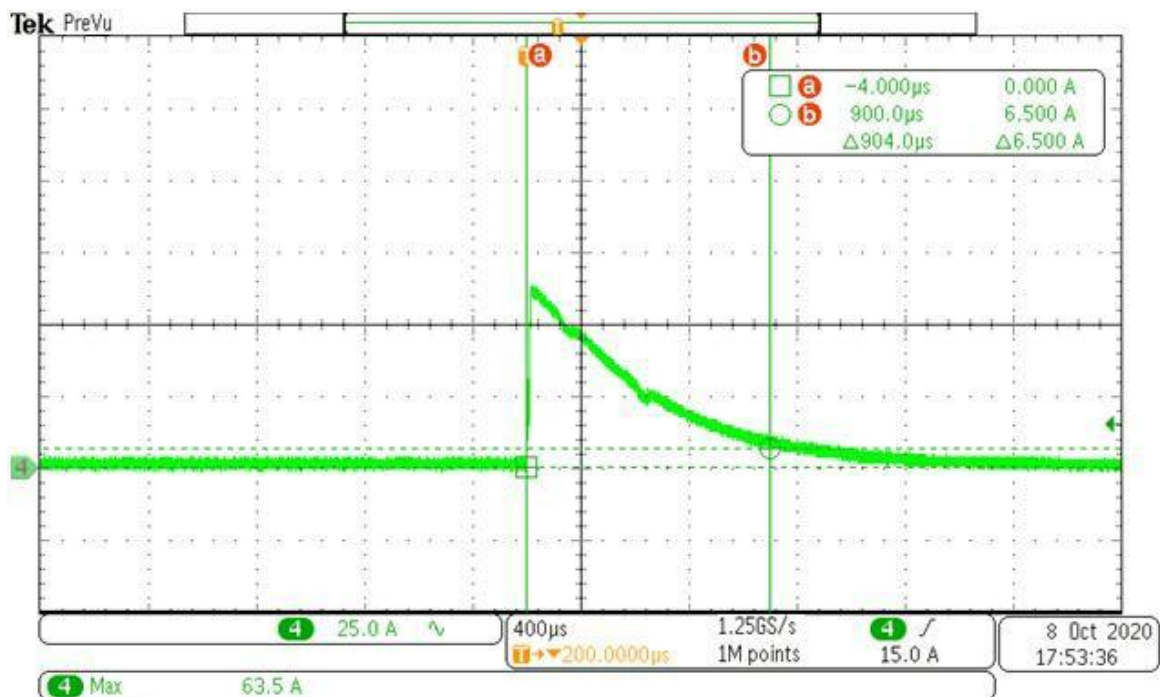




DERATING CURVE

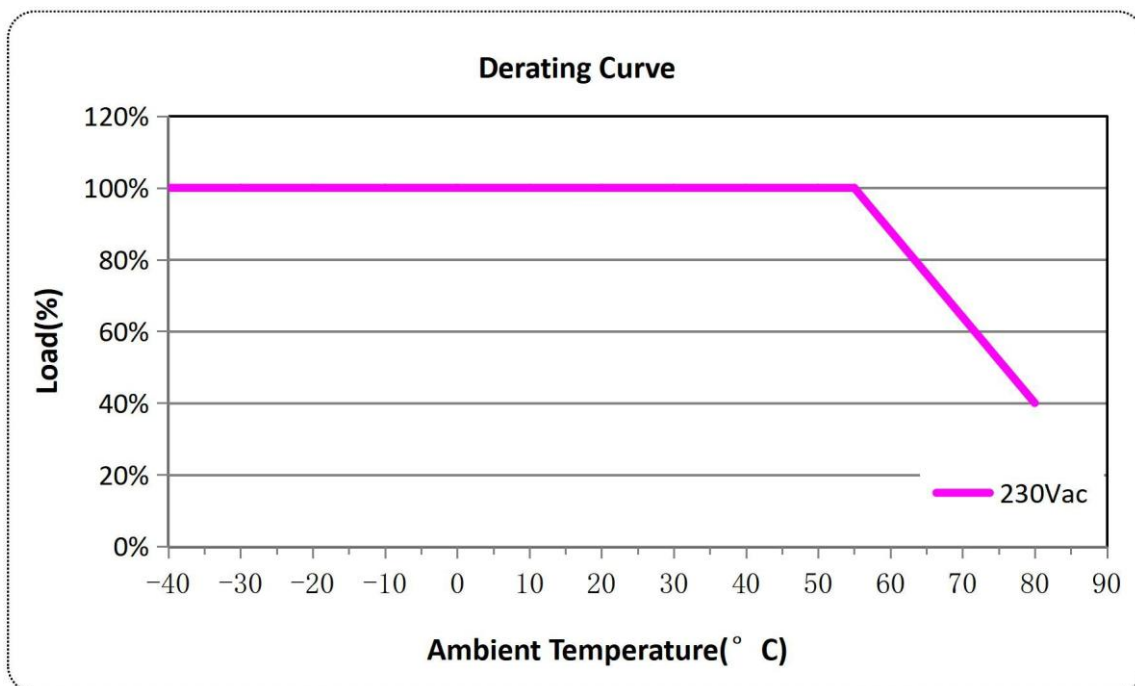


OUTPUT POWER VS INPUT VOLTAGE

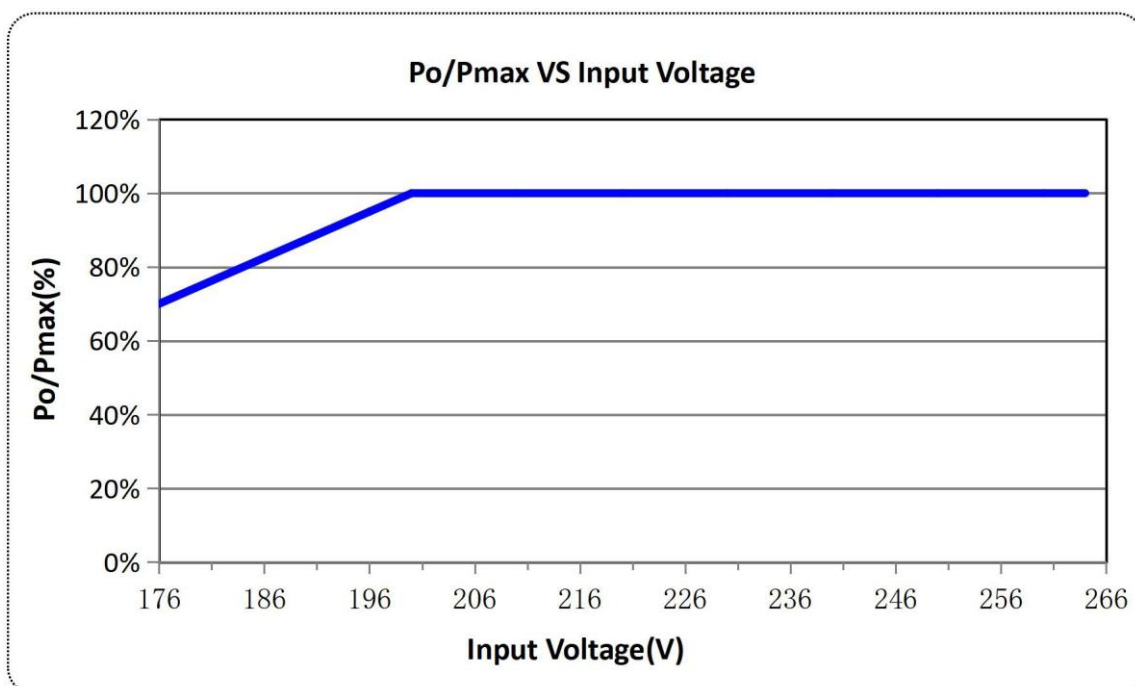

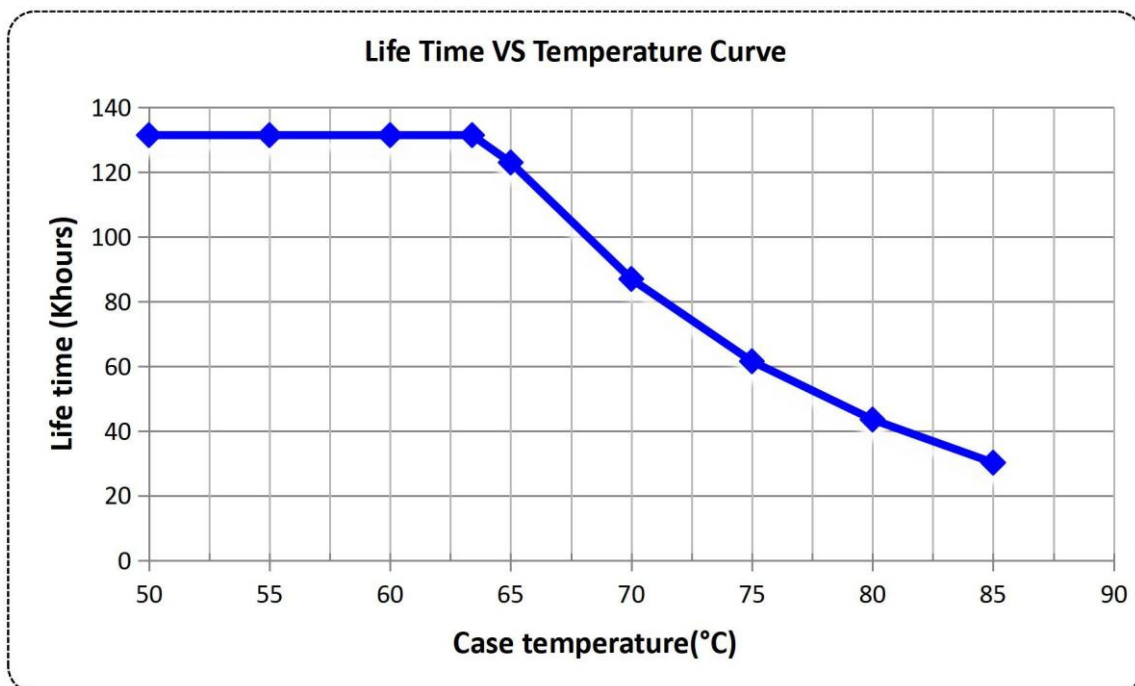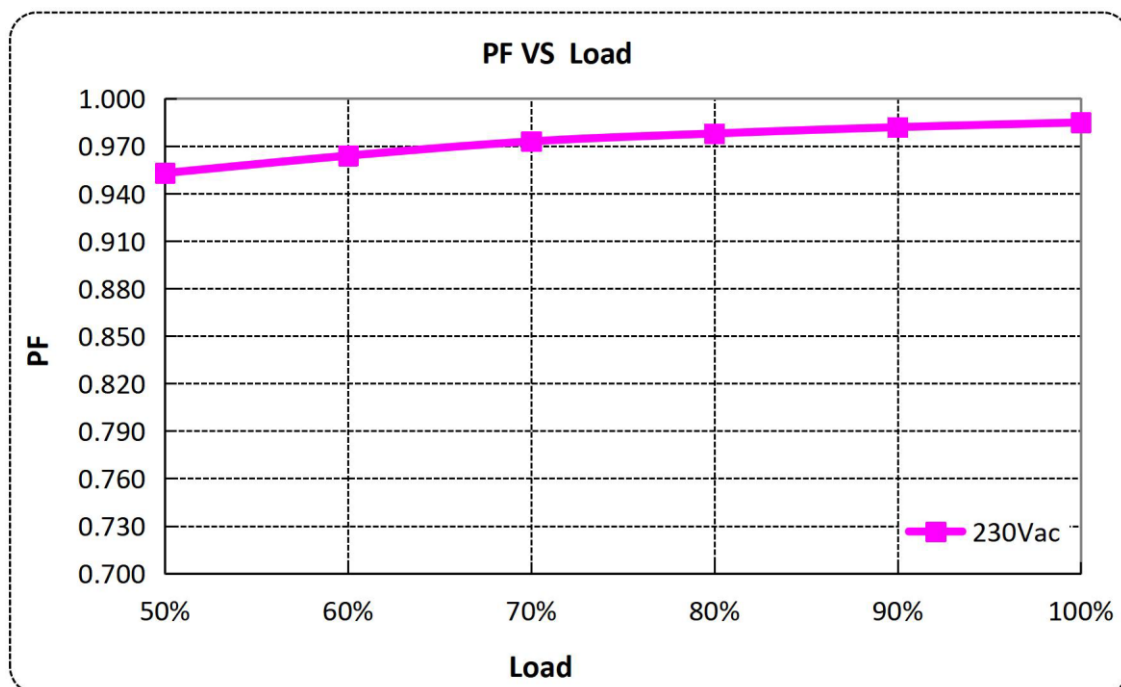LIFETIME VS CASE TEMPERATURE**POWER FACTOR VS LOAD**

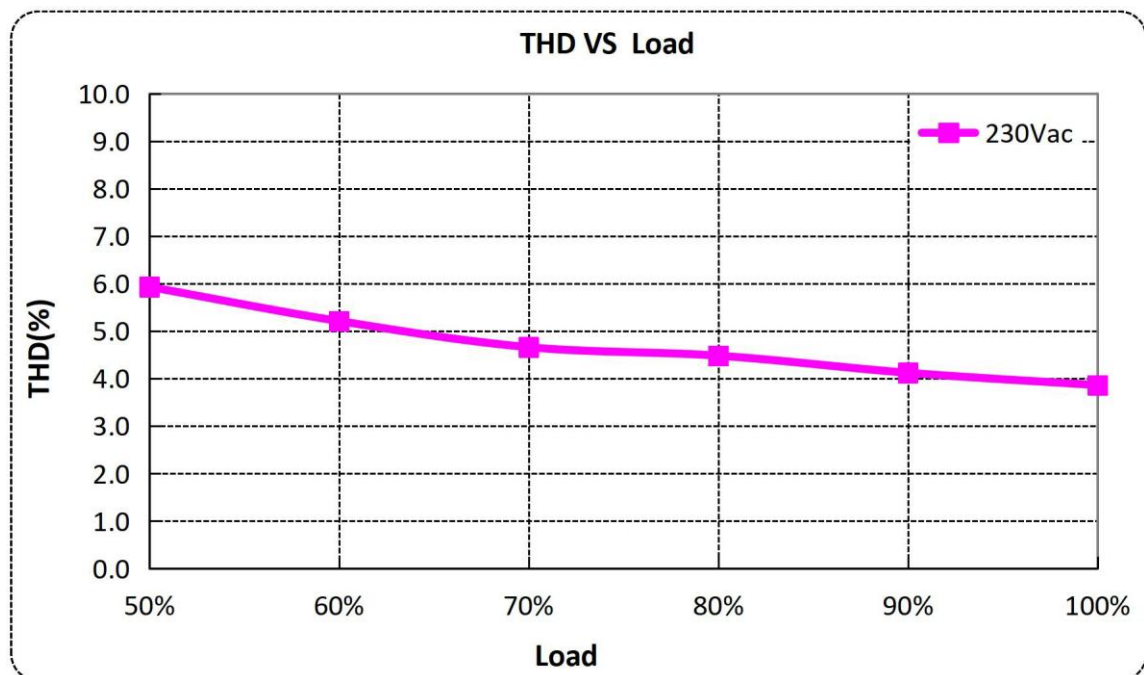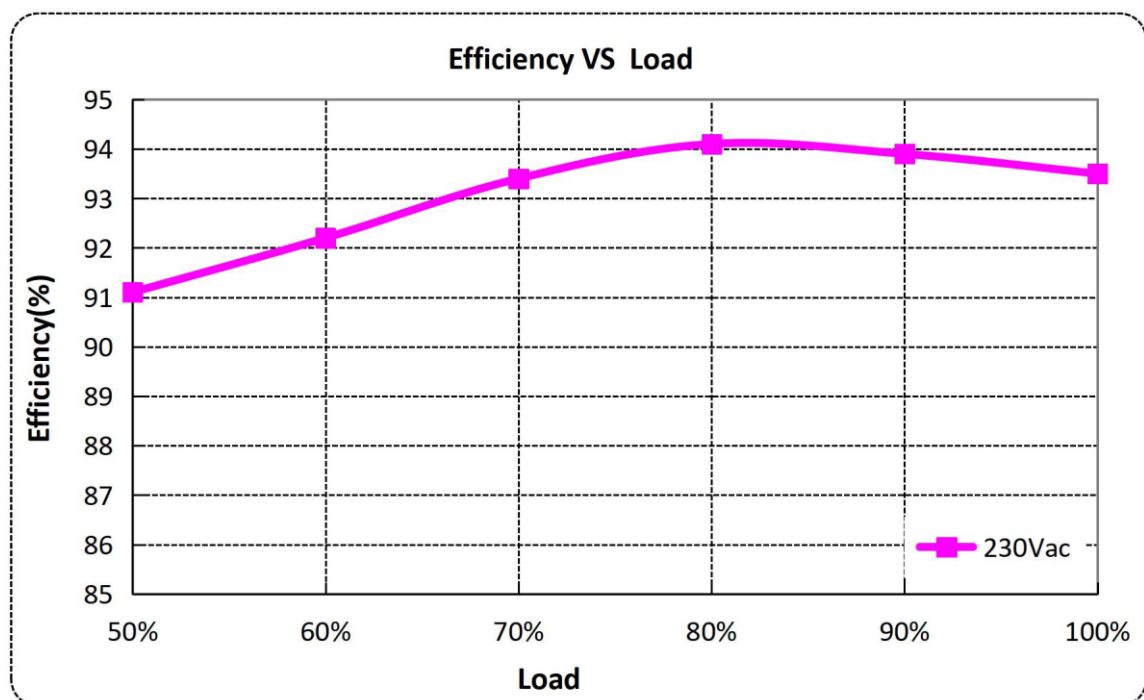
TOTAL HARMONIC DISTORTION**EFFICIENCY VS LOAD****Io=0.7A**

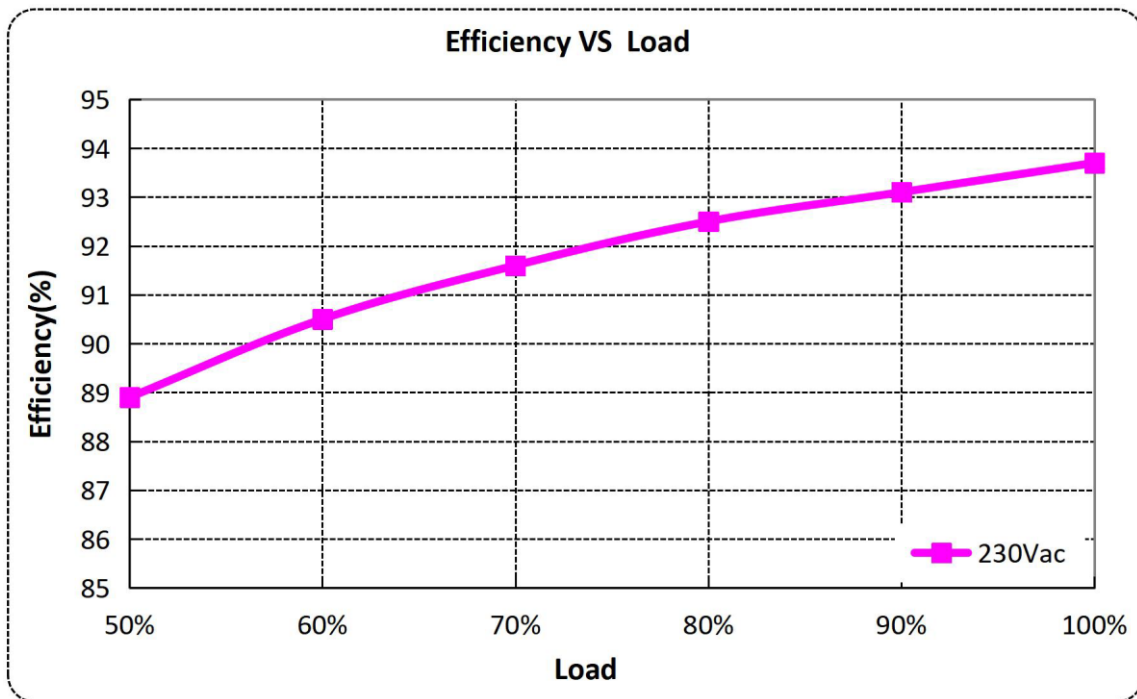Io=1.05A


PROTECTIONS

Parameter		Min.	Typ.	Max.	Notes
External NTC	R1	7.81	7.81kOhm (For reference, subject to actual)	-	When the R-NTC is reduced to R1, the external thermal protection is triggered and the output current gradually decreases
	R2	4.16	4.16kOhm (For reference, subject to actual)	-	When the R-NTC is reduced to R2, the output current is reduced to the programmed protection current value
	Protection Circuit	10% loset	60%loset	100%l oset	10%loset>lomin(Default setting 60%)
		lomin	60%loset	100%l oset	10%loset≤lomin(Default setting 60%)
Over Temperature Protection		Decreases output current, returning to normal after over temperature is removed.			
Short Circuit Protection		Constant current mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Over Voltage Protection		Run into protection model when output voltage exceeds limit, and return to normal when the fault			

DALI2 DIMMING CURVE

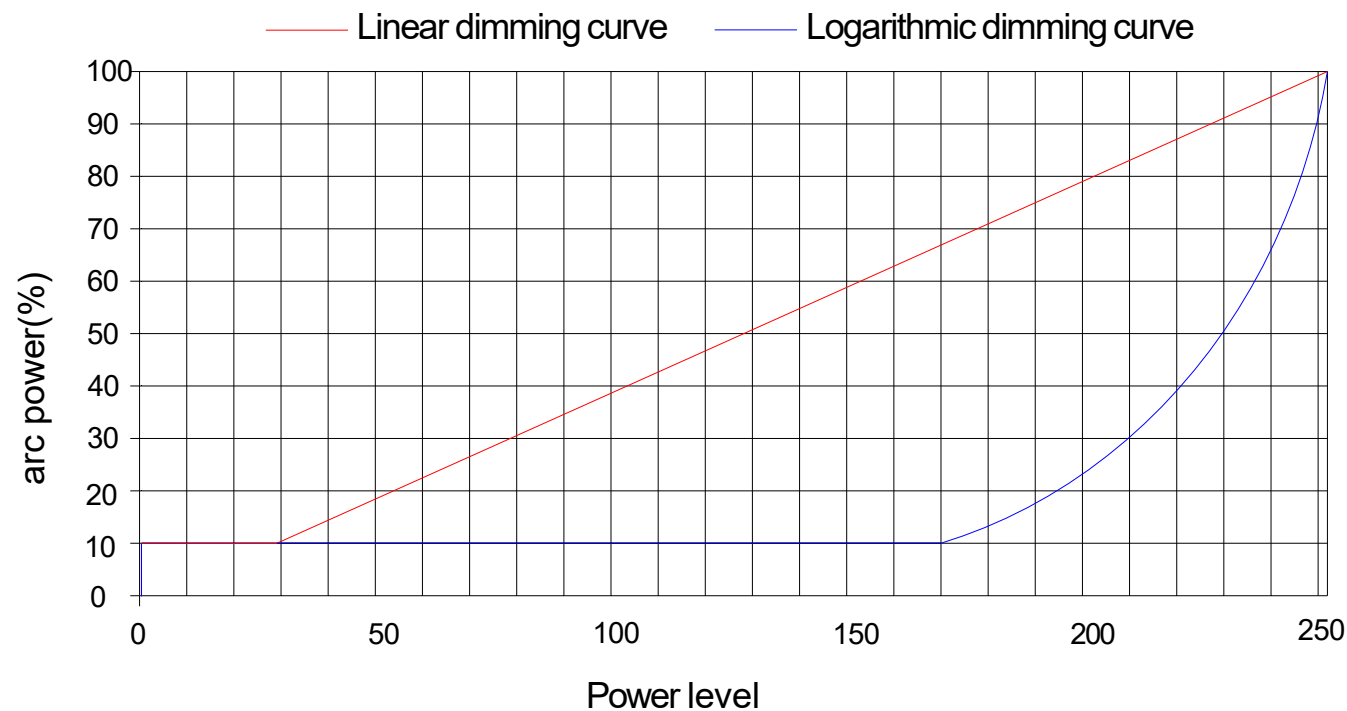


Note: Factory Default Output Logarithmic Curve


DALI2 Standards

IEC62386-101,102,207


DIAGRAM OF UPPER COMPUTER CONNECTION:

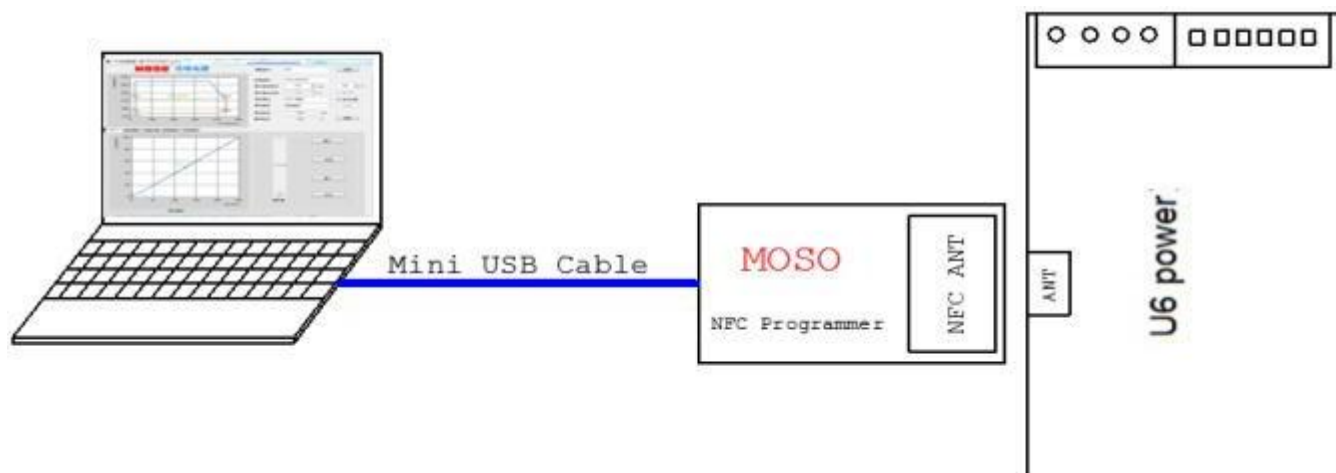

Software programming interface

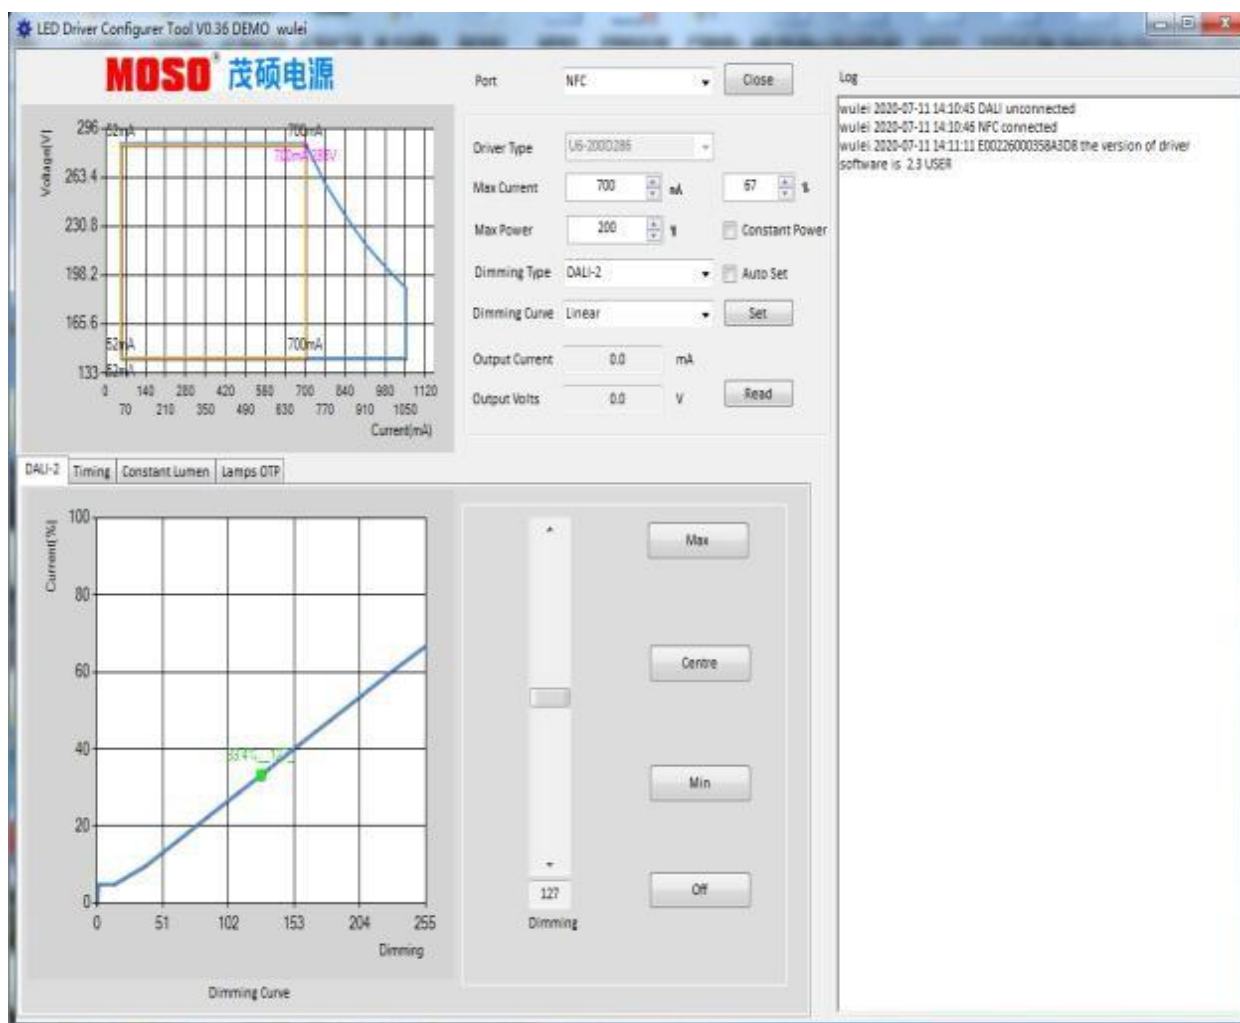

MECHANICAL OUTLINE

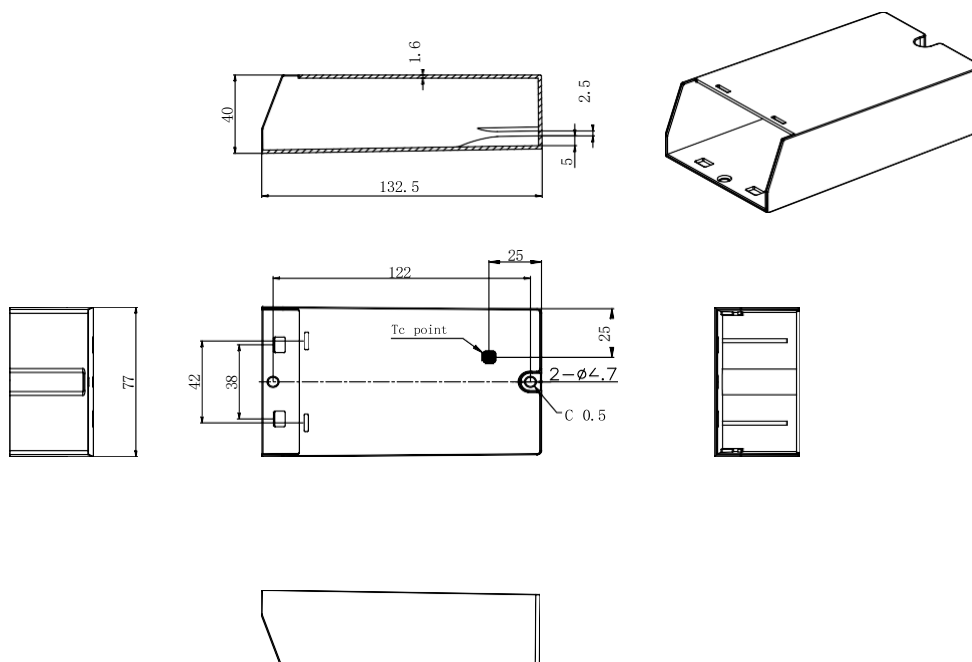

LABEL

