


KEMET, GTX, EMI/RFI Filters, Noise Suppression, 250 VAC, 560 VDC, 10 A, 75x44x25mm

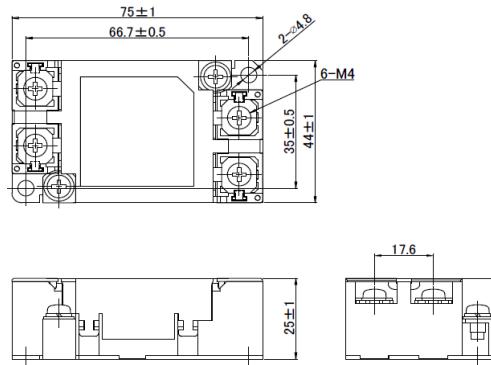

Dimensions	
L	75mm +/-1mm
W	44mm +/-1mm
H	25mm +/-1mm
S	17.6mm NOM
L1	66.7mm +/-0.5mm
W1	35mm +/-0.5mm

Packaging Specifications	
Packaging Quantity:	30
Weight:	124 g

General Information	
Series:	GTX
Style:	Plastic Box
Description:	EMI Filter, With Y Capacitor
Phase:	Single-phase
RoHS:	With Exemptions
REACH:	SVHC (Pb – CAS 7439-92-1)
Qualifications:	UL, cUL, TUV
Tightening Torque:	1.2 ~ 1.4N-m (Recommended)
Line Terminal:	14-4(JST)
Line Terminal Width:	12 Max.
Earth Terminal:	R5.5-4(JST)
Earth Terminal Width:	9.5 Max.
Miscellaneous:	60 K Self-Temperature Rise Max.
Terminal Type:	Screw

Specifications	
Voltage AC:	250 VAC
Voltage DC:	560 VDC
Voltage:	560 VDC
Rated Current:	10 A
Ripple Current:	10 A
Temperature Range:	-25/+55°C
Leakage Current:	2.3 mA (MAX)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.