
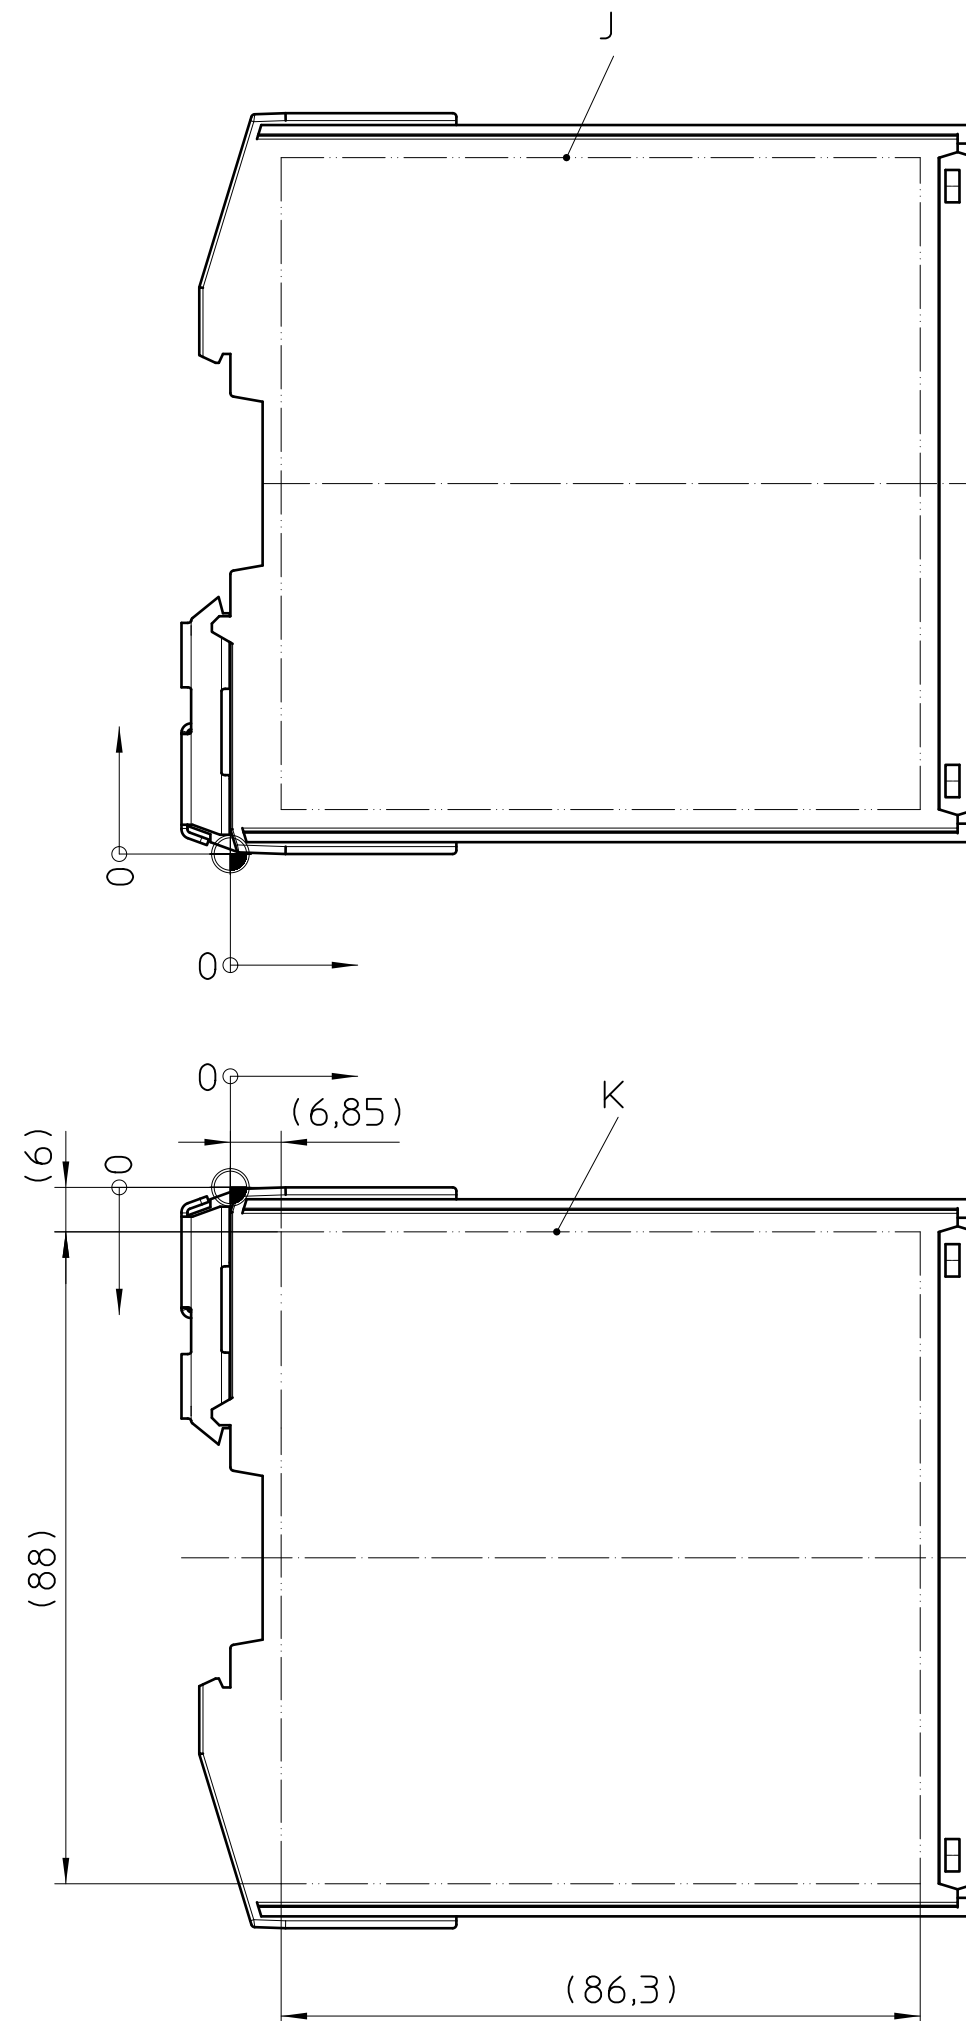
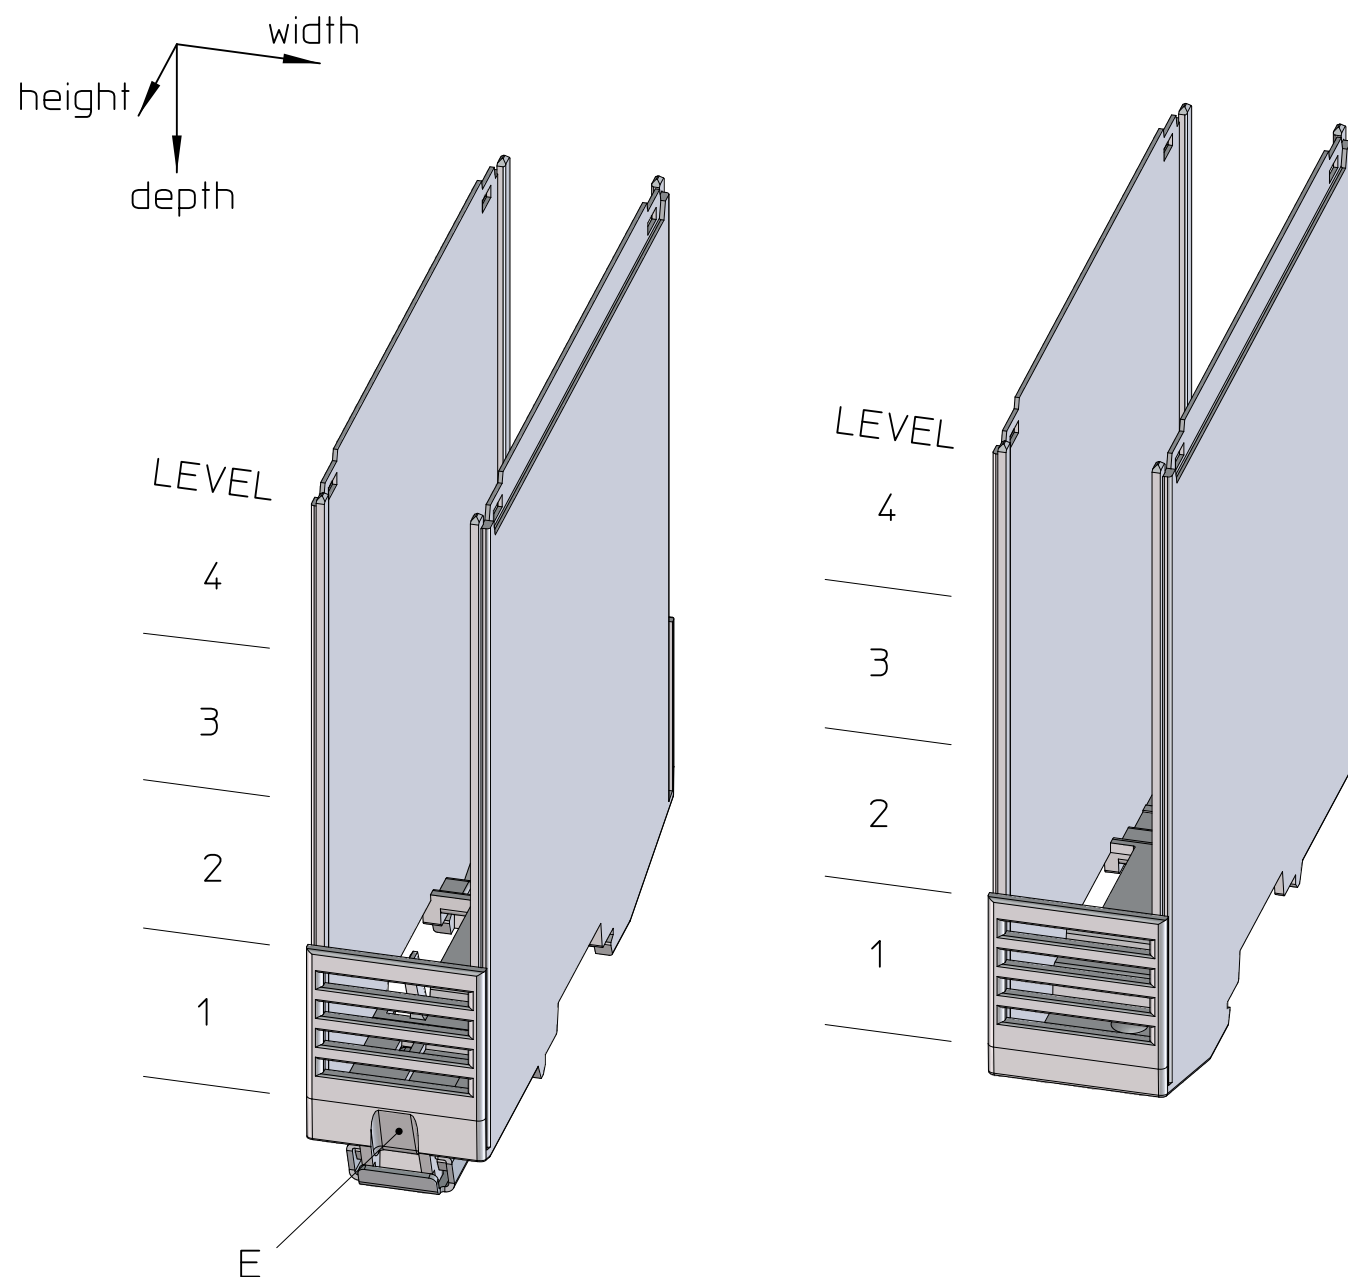


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet, entgegenstehenden besonderen Bestimmungen, insbesondere in Bezug auf das Zitieren der Literatur, aus dem vorliegenden Dokument das Zitieren von anderen Dokumenten im Rahmen der Informationsversorgung zu entnehmen. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Das Quarantänedatumsfeld ist in den Toleranzangaben nicht berücksichtigt.

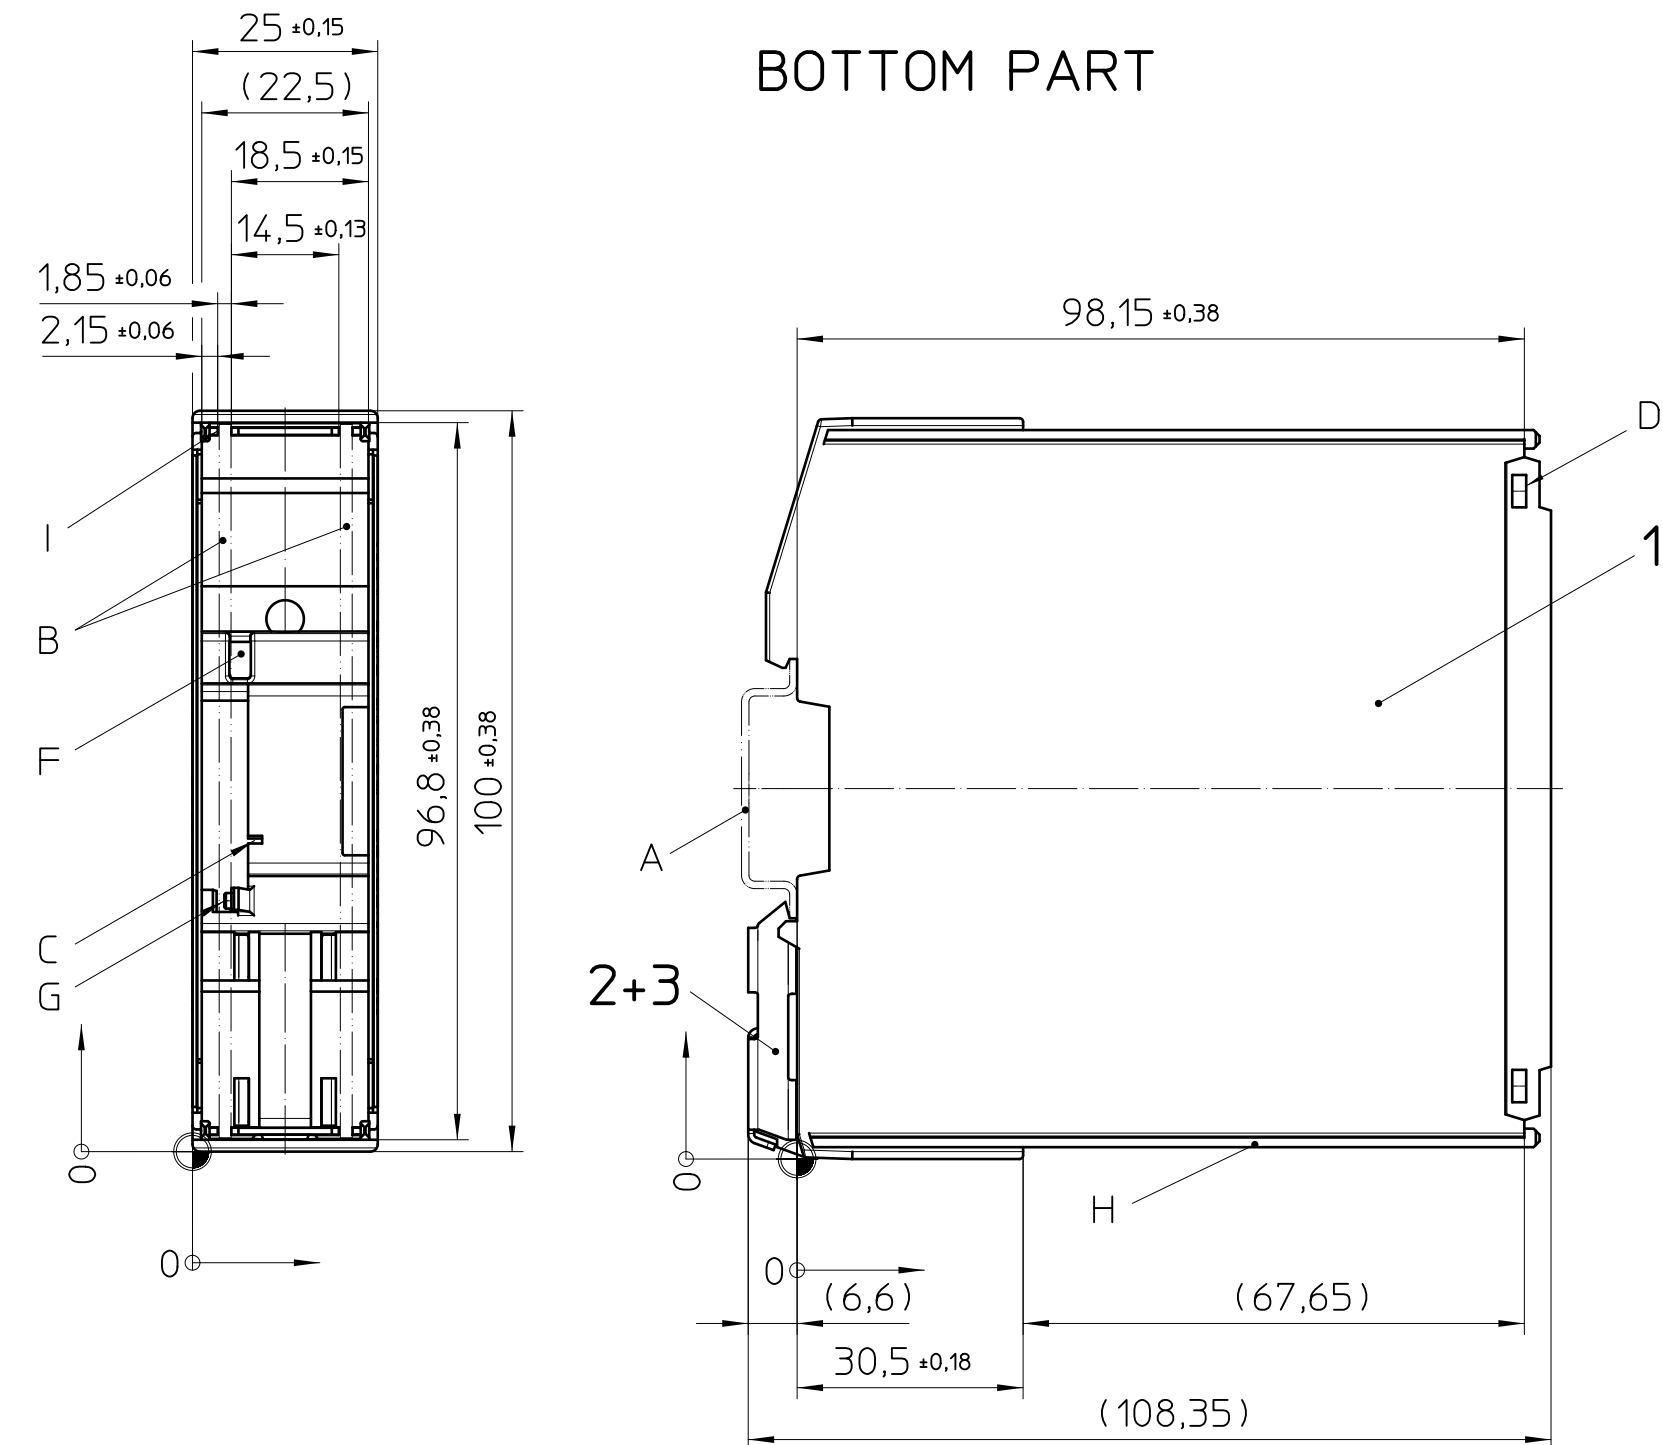

General Information:

- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
-  Workpiece zero point for mechanical processing
- Tolerances for printing DIN ISO 2768-m
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:

- A. Mounting rail like EN 60715, TH 35-7,5 or mounting rail similar EN 60715, TH 35-15x1,5
- B. PCB $t=1,6\pm0,2$
- C. Guidance slot for TBUS8 . . .
- D. Opening for fixing ICS25-C100 . . . or ICS25-TL100 . . .
- E. Notch for locking release, by screw driver
- F. Opening for ICS-FE-CONTACT
- G. Fixing PCB
- H. Guidance for ICS25-F . . . or ICC25 . . .
- I. PCB guidance
- J. Marking area left
- K. Marking area right

Pos.	QTY	Description	Material
1	1	BOTTOM PART	PA
2	1	FOOT CATCH	STL
3	1	SPRING	STL

 DIN A2		document-no. / n°	article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions (mm)
		01081942 / 03	2203881	1:1	
		date	document-type		
		29.08.2024	TECDOC 2D_Productdrawing		
		description			
		ICS25-B100X98-V-7035			
page 1	of 1				