


# TS2659



## Temperature cable sensor with screw-in sensor

TS-PT100-SCREW-IN M6

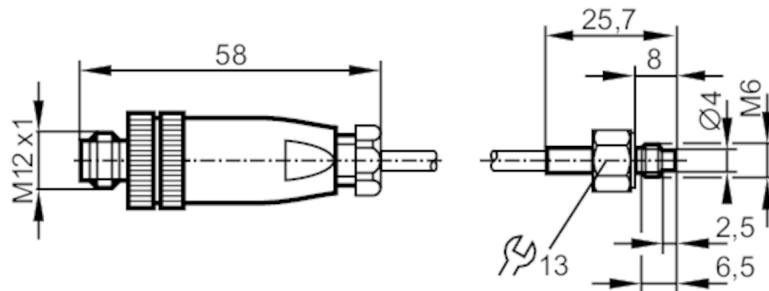

### Product characteristics

Measuring range	-30...180 °C	-22...356 °F
Process connection	threaded connection M6 external thread	

### Application

Measuring element	1 x Pt 100; (to DIN EN 60751, class A)
Installation	surface mount RTD for solid bodies

### Electrical data

Protection class	III
------------------	-----

### Measuring/setting range

Measuring range	-30...180 °C	-22...356 °F
-----------------	--------------	--------------

### Accuracy / deviations

Accuracy	[K]	± (0,15 K + 0,002 x t )
----------	-----	-------------------------

### Response times

Dynamic response T05 / T09	[s]	3 / 8; (to DIN EN 60751)
----------------------------	-----	--------------------------

### Operating conditions

Protection	IP 67
------------	-------

### Tests / approvals

MTTF	[years]	10377.8
------	---------	---------

### Mechanical data

Weight	[g]	110.7
Housing	cylindrical	
Design	screw-in sensor	
Materials	stainless steel (316L/1.4404)	
Process connection	threaded connection M6 external thread	
Probe diameter	[mm]	4

### Remarks

Pack quantity	1 pcs.
---------------	--------


## Temperature cable sensor with screw-in sensor

TS-PT100-SCREW-IN M6

### Electrical connection

Cable: 2 m, silicone

Connector: 1 x M12; coding: A



### Connection

