
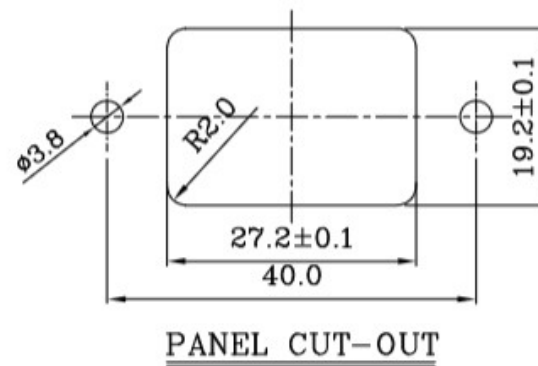
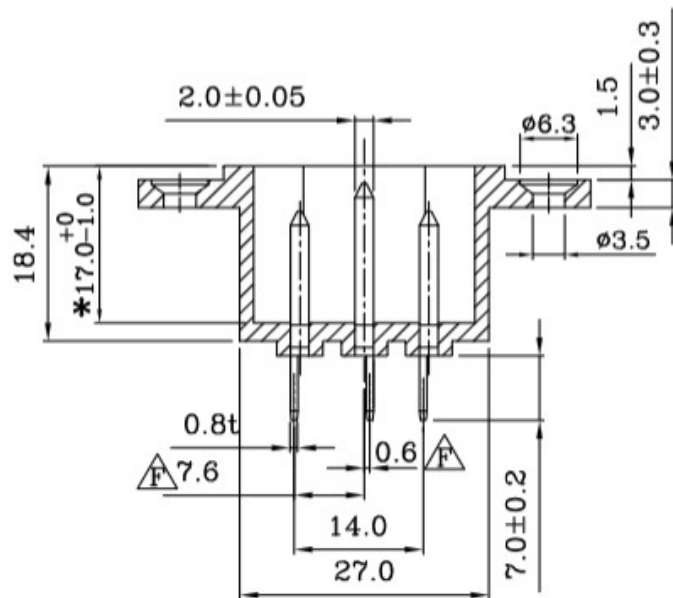
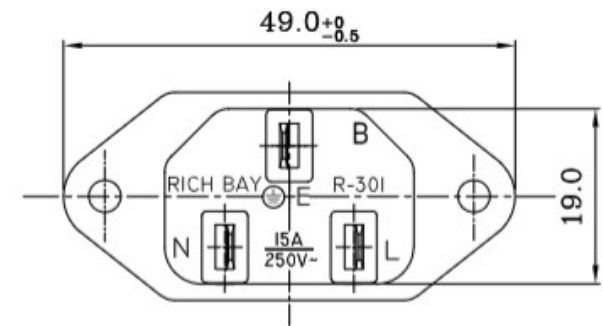
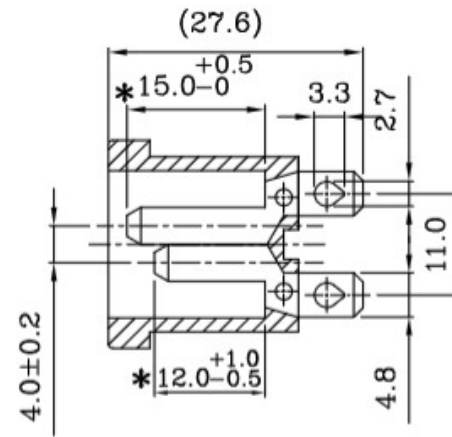


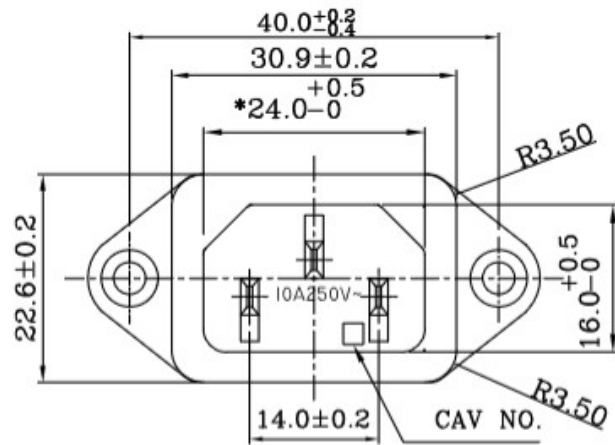

SPECIFICATION:

1. INSULATION RESISTANCE: OVER $100M\Omega$ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Material: Thermoplastic . UL 94V-2~0

Rating: AC 15A 250V	
Mark	Safety Regulation
	UL
	CUL
Rating: AC 10A 250V	
Mark	Safety Regulation
	VDE
	CCC
	ENEC