

Thick-film power resistor RTS-02

Page 1 of 4

04.10.2022 / ver. 3.2

Characteristics



Description

RTS series high power resistors are made in a thick film technology on stainless steel substrate. Resistors are characterized by a high power at small size, high resistance to temporary overloads and very low inductance which make them useful at high power and high frequency applications. Mounting holes dimensions are compliant with standard thick film heat-sinkable power resistors, which allows for an easy replacement. Various types of connectors are available, in standard resistors are equipped with 5/A screw connectors. Resistors are designed for use with suitable heatsink.

Features

- Very good power/volume ratio
- Power applications up to 1000W
- Wide ohmic range
- Flat design
- Non inductive
- Easy mounting
- RoHS compliant



Technical Specifications

	RTS-02-300	RTS-02-600
Resistance range	0,1 Ω ... 1 MΩ (available also < 0,1 Ω)	
Resistance tolerance	±5%, ±10 %	
Power rating (on heatsink)	300 W	600 W
Electric strength voltage		2,5 kV
Inductance		< 0,7 µH
Temperature coefficient	±100 ppm/°C (available also ±1500 ppm/°C)	
Max operating temperature	170°C (available also 300°C)	
External dimensions		67 x 60 x 2 mm
Mounting - torque for contacts M4		1,6 Nm ... 1,8 Nm



Contact technical department for more informations.

Thick-film power resistor RTS-02

Page 2 of 4

04.10.2022 / ver. 3.2


Thermal resistance

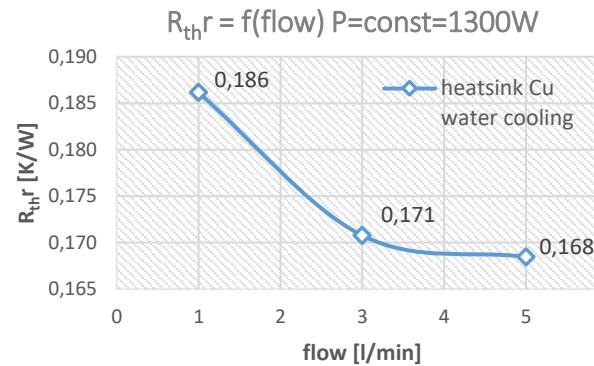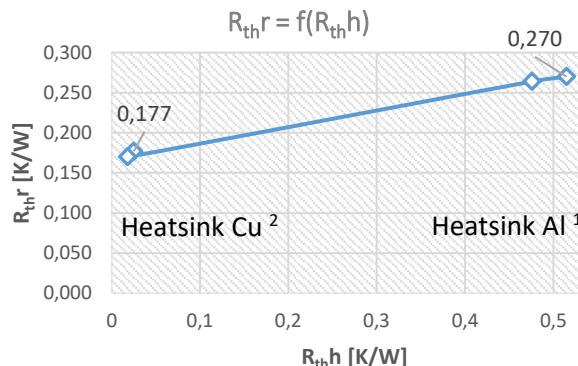

R_{thr} – Thermal resistance of the RTS-02 resistor

R_{thh} – Thermal resistance of the heatsink

Temperatures on resistor with different working conditions

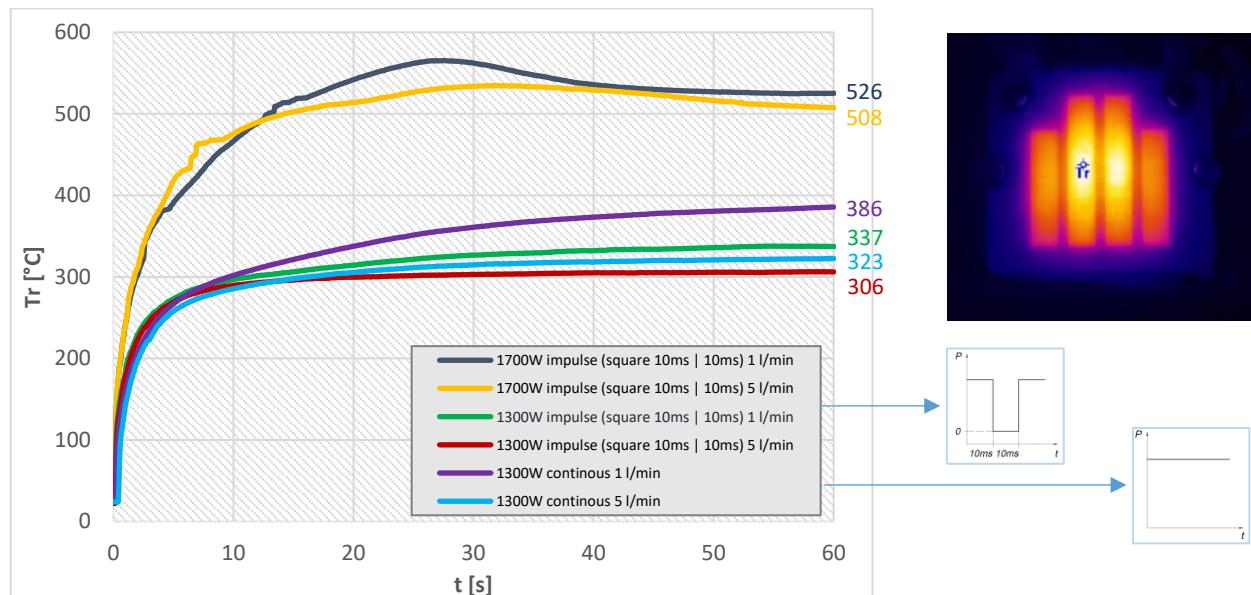


Tr – Temperature on resistor surface, Heatsink Cu² (water 21 °C), AAB TG4 thermal grease, 1,6 Nm mounting screws

Overload

Every test resistor was mounted with thermal grease (AAB TG4) on a heatsink Cu²


- Constant inlet water temperature: +20°C (flow 0,5l/min)
- Pulse length: $t_1 = 200\text{ms}$; 600ms ; 1s ; 5s ; 10s
- Pulse shape: rectangular
- Break time between pulses: 30s
- Test time: 10min



Thick-film power resistor RTS-02

Page 3 of 4


04.10.2022 / ver. 3.2

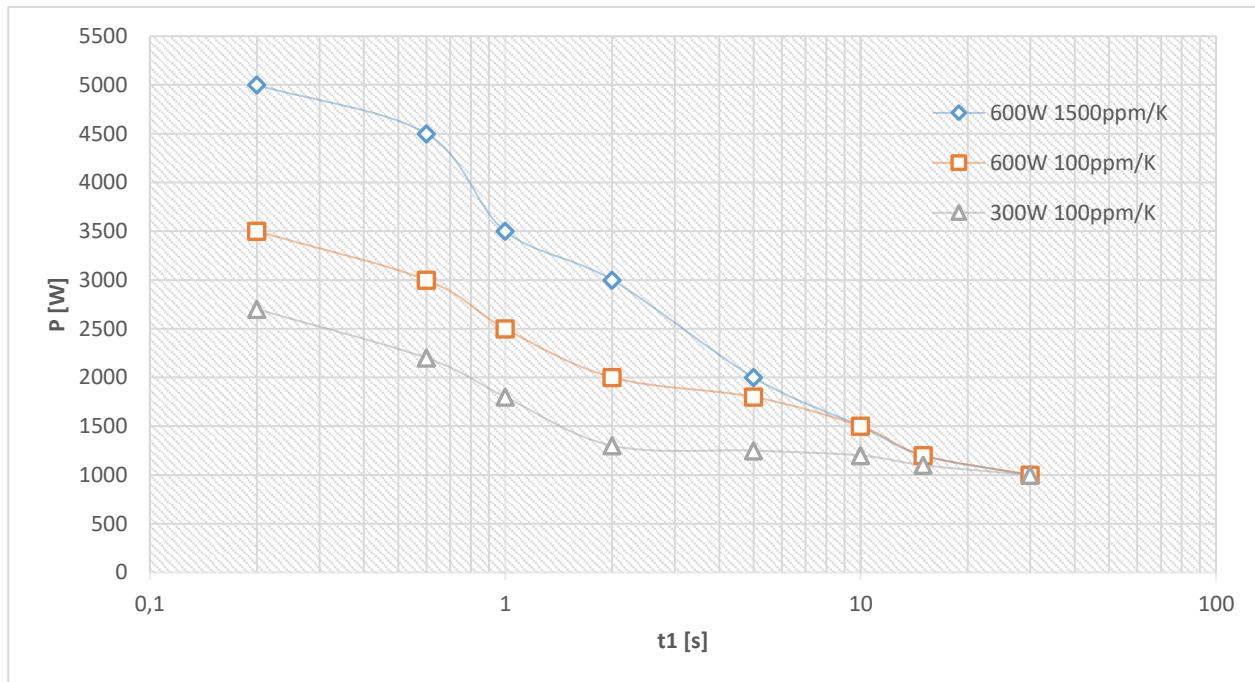


Do you need to check the resistor in your application ? Contact us for custom measurements / samples.

Used heatsinks

¹ Heatsink Al – 202x70x70mm, 62cm² cross section,
 $R_{th,h}=0,48$ K/W (no air-cooling)

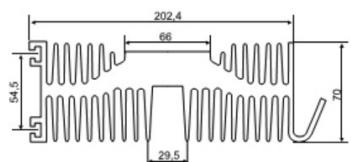


² Heatsink Cu – 195x150x26 with water cooling,
 $R_{th,h}=0,025$ K/W (1 l/min, 21 °C)

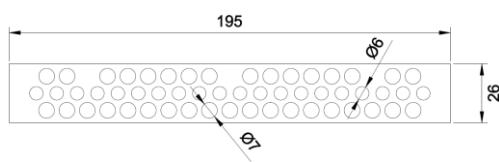

External dimensions

[mm]

RTS-02-300-...
RTS-02-600-...

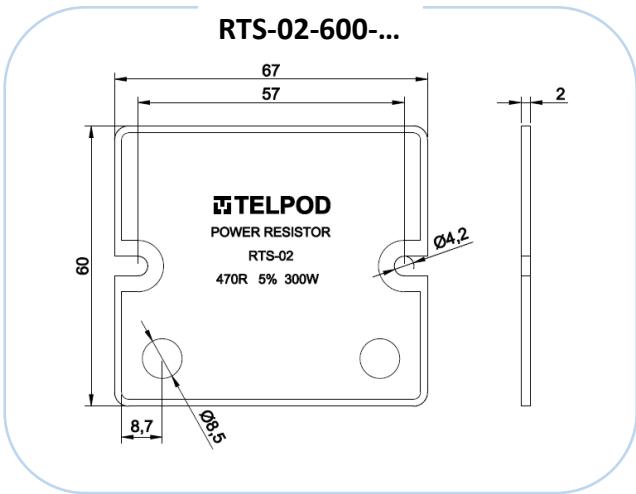


Thick-film power resistor RTS-02

Page 4 of 4

04.10.2022 / ver. 3.2

Types of terminals

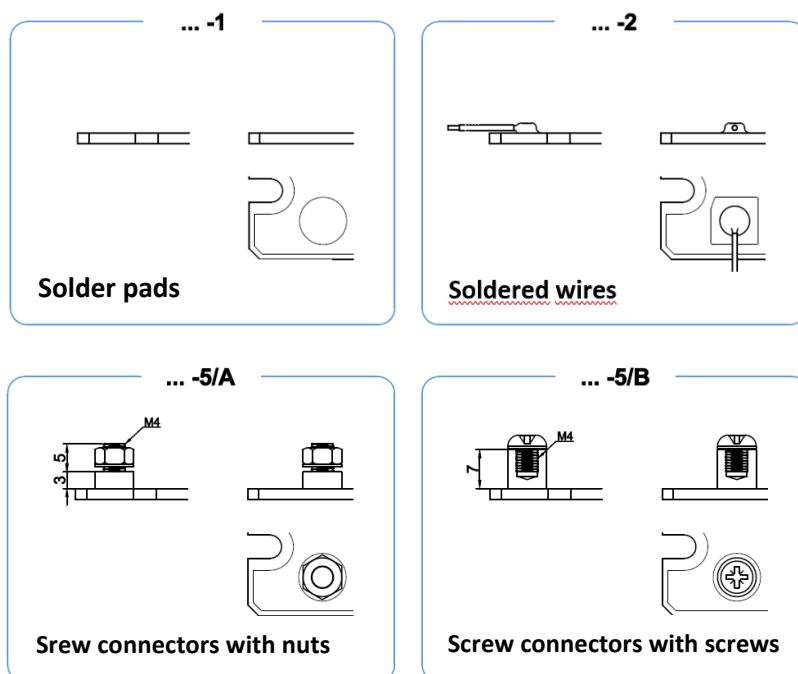

The recommended tightening torque for 5/A and 5/B connections is **1.2 Nm**

Mounting to the heat sink

The resistor should be screwed to the heat sink with M4 screws. In order to ensure effective heat transfer, we recommend using thermocouples dedicated specifically to our products. More information on [RTS-THERMOPADS](#).

Ordering informations

Series	-	Power	-	Resistance	-	Tolerance	-	Terminal
RTS-02		300 W 600 W		0R11M		5 % 10 %		1 2 5/A 5/B

Example

RTS-02 - 300 - 1R - 5 - 5/A

RTS-02 series resistor with power 300W, resistance $1\Omega \pm 5\%$ with screws and nut connections.

TELPOD S.A.

Pilsudskiego 63A
32-050 Skawina
www.telpod.pl

Sales Division

Tel.: +48 (0)12 257 10 35
Fax: +48 (0)12 257 10 13
order@telpod.pl

Technical Division

construction@telpod.pl
thickfilm@telpod.pl

