

IN800152
INDUCTIVE SENSORS • INCREASED AMBIENT TEMPERATURE

sensor inductive, M80x1.5 66long, Non-flush, Sn: 50, 10-35V DC, 160°C, PNP NO, Cable 10m Silicone, IP65, Stainless steel 1.4305


MECHANICAL FEATURES

Active area material of sensor	Polytetrafluorethylene (PTFE)
Alignment of cable entry	Axial
Ambient temperature	0 °C ... 160 °C
Cable infeed	Axial
Cable length	10 m
Degree of protection (IP)	IP65
Design	Cylinder, screw-thread
Housing material	Stainless steel 1.4305
Increased ambient temperatures > 80°C	+
Material of cable sheath	Silicone
Mechanical mounting condition for sensor	Non-flush
Pressure-proof	-
Sensor length	66 mm
Thread length	40 mm
Thread pitch	1.5 mm
Thread size, metric	80

ELECTRICAL FEATURES

Cascadable	-
Hysteresis	15 %
No-load current	15 mA
Norm measuring plate	80x80x1
Rated switching current	150 mA
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V ... 35 V
Switching distance	50 mm
Switching frequency	100 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V

ELECTRICAL FEATURES

Voltage type	DC
With monitoring function of downstream devices	-

OTHER FEATURES

Areas inquiry	+
---------------	---


Other

Packaging dimensions	138.0mm x 95.0mm x 210mm
Shipping weight	1.14kg
Tariff code	85365019

Classification

ipf product group	202
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

Connection

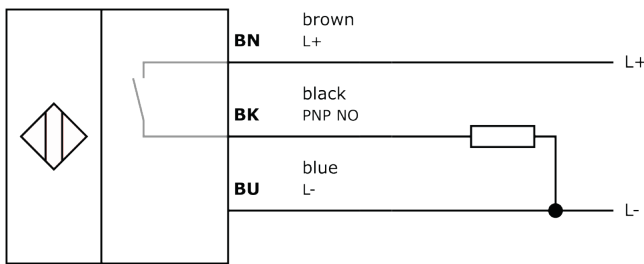

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.