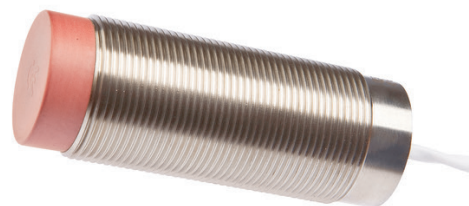


IN306052
INDUCTIVE SENSORS • INCREASED AMBIENT TEMPERATURE

sensor inductive, M30x1.5 79long, Non-flush, Sn: 13, 230°C, Other Anschluss an Verstärker, Cable connector M12 10m Polytetrafluorethylen (PTFE), IP50, Stainless steel 1.4305


MECHANICAL FEATURES

Active area material of sensor	Vectra®
Alignment of cable entry	Axial
Ambient temperature	0 °C ... 230 °C
Cable infeed	Axial
Cable length	10 m
Degree of protection (IP)	IP50
Design	Cylinder, screw-thread
Housing material	Stainless steel 1.4305
Increased ambient temperatures > 80°C	+
Material of cable sheath	Polytetrafluorethylen (PTFE)
Mechanical mounting condition for sensor	Non-flush
Pressure-proof	-
Sensor length	79 mm
Thread length	60 mm
Thread pitch	1.5 mm
Thread size, metric	30

ELECTRICAL FEATURES

Cascadable	-
Connection to amplifier	+
Hysteresis	15 %
Norm measuring plate	30x30x1
Suitable for safety functions	-
Switching distance	13 mm
Switching frequency	150 Hz
Type of electrical connection	Cable connector M12
Type of switching function	Amplifier
Type of switching output	Other
With monitoring function of downstream devices	-


Other

Packaging dimensions	99.0mm x 60mm x 160mm
Shipping weight	0.54kg
Tariff code	85365019


Classification

ipf product group	202
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

Connection

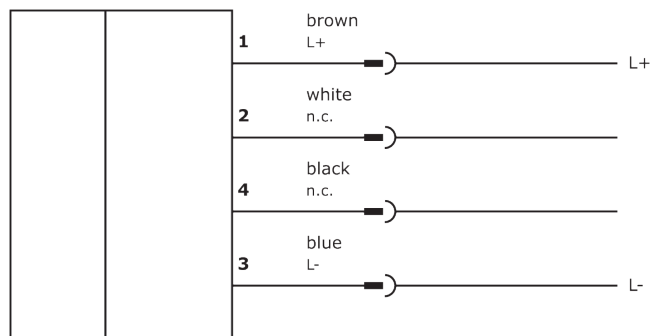

Dimensional drawing

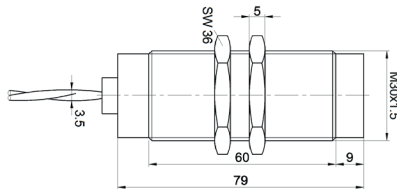

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.